

ET635XX - Ultra-Low I_q 300mA LDO

General Description

The ET635XX series of CMOS low dropout regulators are designed specifically for portable battery-powered applications which require ultra-low quiescent current. The ultra-low consumption of type 0.20 μ A ensures long battery life and dynamic transient boost feature improves device transient response for wireless communication applications.

The ET635XX has fast response to input voltage transients and load current transients, and ensures no over voltage during startup and short-circuit recovery. The ET635XX series integrates short-circuit protection and current limiting protection functions. Activate the shutdown mode by pulling down the EN pin.

The ET635XX family offered in small SOT23-5, DFN4(1mm $\times$ 1mm) packages.

Features

- Operating Input Voltage Range from 2.0V to 5.5V
- Standard Fixed Output Voltage: 1.2V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V and 3.6V etc.
- Ultra-Low Quiescent Current Typical 0.20 μ A
- Low Dropout is Typical 100mV at 100mA@ $V_{OUT}=3.3V$
- High Output Voltage Accuracy $\pm 2\%$
- Over-Current Protection
- Short-Current Protection
- Thermal Shutdown Protection
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant
- Auto-Discharging Function
- Package Information:

Part No.	Package	MSL
ET635XXYB	DFN4(1mm $\times$ 1mm)	Level 1
ET635XX	SOT23-5	Level 3

Applications

- Battery Powered Equipment
- Portable Communication Equipment
- Cameras, Image Sensors and Camcorders
- Label Information


ET635XX

Device Information

ET 635 XX X B

<u>XX</u> Output Voltage		<u>X</u> Package		<u>B</u> Auto-Discharging Function	
XX	Output Voltage For example, 18 is 1.8V output	Y	DFN4(1mm×1mm)	B	Auto-discharging available
		/	SOT23-5		

Pin Configuration

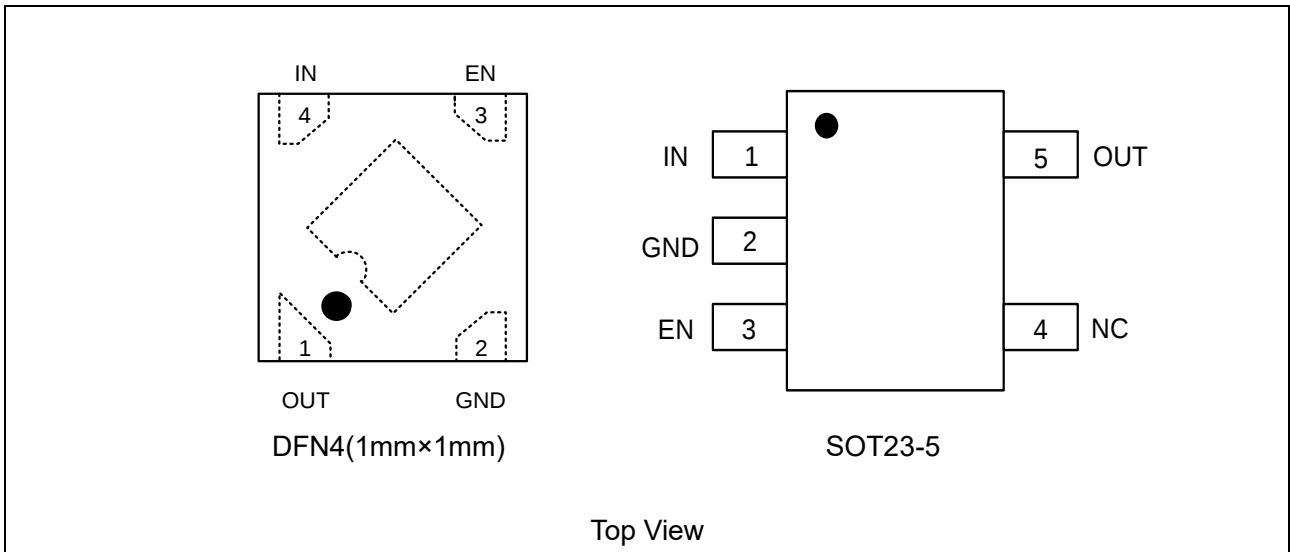


Pin Function

Pin No.		Pin Name	Pin Function
DFN4	SOT23-5		
1	5	OUT	Output pin. A low-ESR capacitor should be connected to this pin to GND.
2	2	GND	Ground pin.
3	3	EN	Enable control input pin, active high. Do not leave EN floating
4	1	IN	Supply input pin. Must be closely decoupled to GND with a ceramic capacitor
-	4	Thermal Pad or NC	Thermal pad for DFN4 package, connect to GND or leave floating. Do not connect to any potential other than GND. NC for SOT23-5 no connection.

ET635XX

Block Diagram

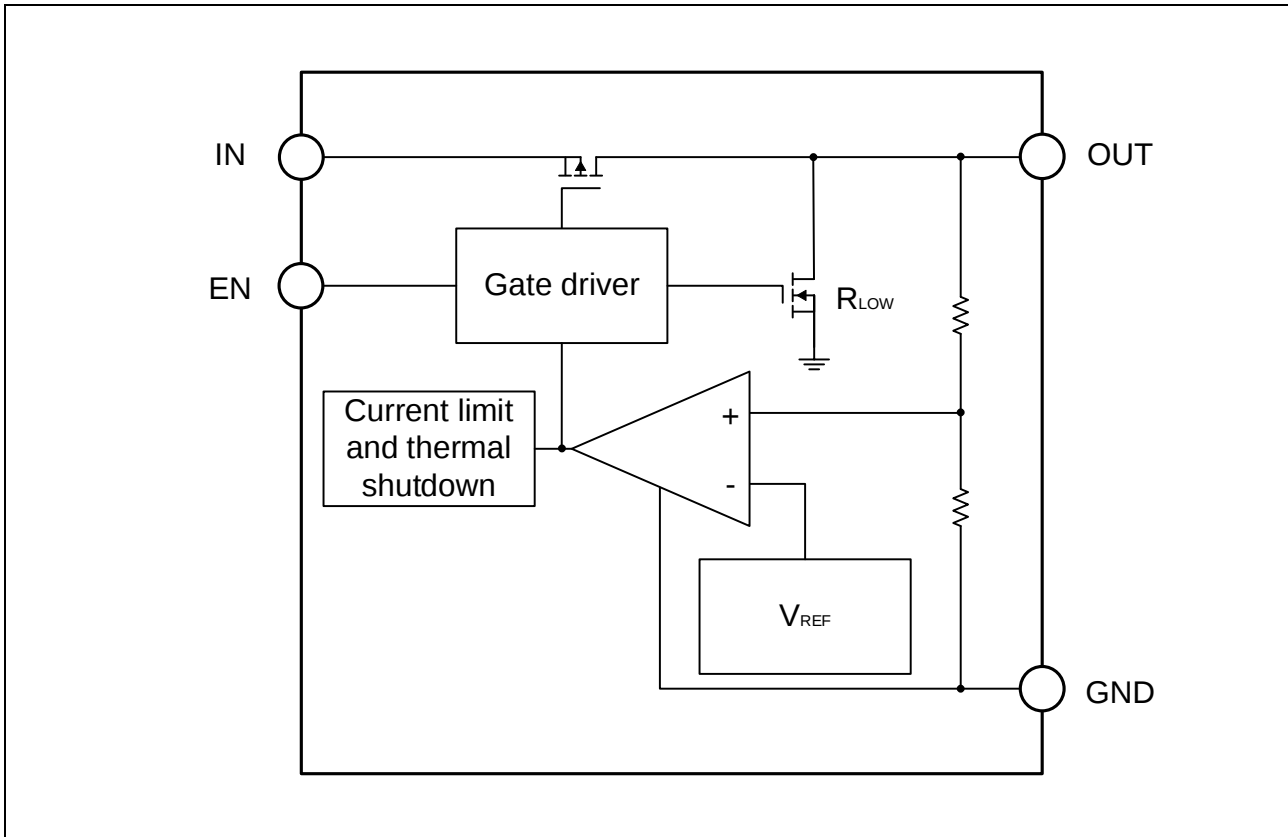

Functional Description

General

The ET635XX is a high performance 300mA linear regulator with ultra-Low I_Q . This device delivers low Noise and high Power Supply Rejection Ratio with excellent dynamic performance due to employing the Dynamic Quiescent Current adjustment which assure ultra-low I_Q consumption at no-load state. These parameters make this device very suitable for various battery powered applications.

Input Capacitor

It is recommended to connect at least a 1.0 μ F Ceramic X5R or X7R capacitor between IN and GND pins of the device. This capacitor will provide a low impedance path for any unwanted AC signals or Noise superimposed onto constant Input Voltage. The good input capacitor will limit the influence of input trace inductances and source resistance during sudden load current changes.

Higher capacitance and lower ESR Capacitors will improve the overall line transient response.

Output Capacitor

It is recommended to connect at least a 1.0 μ F Ceramic X5R or X7R capacitor between OUT and GND pins of the device. This capacitor will provide a low impedance path for any unwanted AC signals or Noise superimposed onto constant Input Voltage.

There is recommended connect the output capacitor as close as possible to the output pin of the regulator.

ON/OFF Input Operation

The ET635XX uses the EN pin to enable /disable its device and to activate /deactivate the active discharge function at devices with this feature. If the EN pin voltage is pulled below 0.4V the device is guaranteed to be disable. The active discharge transistor at the devices with Active Discharge Feature is activated and the output voltage V_{OUT} is pulled to GND through an internal circuitry with effective resistance about 80Ω.

If the EN pin voltage is higher than 1.0V the device is guaranteed to be enabled. The internal active discharge circuitry is switched off and the desired output voltage is available at output pin. In case the Enable function is not required the EN pin should be connected directly to input pin.

Current Limit Protection

When output current at the OUT pin is higher than current limit threshold, the current limit protection will be triggered and clamp the output current to approximately 550mA to prevent over-current and to protect the regulator from damage due to overheating.

Thermal shutdown Protection

When the die temperature exceeds the Thermal Shutdown point ($T_{TSD} = 150^{\circ}\text{C}$ typical) the device goes to disabled state and the output voltage is not delivered until the die temperature decreases to 125°C . The Thermal Shutdown feature provides a protection from a catastrophic device failure at accidental overheating. This protection is not intended to be used as a substitute for proper heat sinking.

Power Dissipation and Heat sinking

The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material and the ambient temperature affect the rate of junction temperature rise for the part. The maximum power dissipation the ET635XX device can handle is given by:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA}$$

ET635XX

Absolute Maximum Ratings

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Symbol	Parameters (Items)	Value	Unit
V _{IN}	IN pin Voltage ⁽¹⁾	-0.3 to 6.0	V
V _{EN}	EN Pin Voltage	-0.3 to 6.0	V
V _{OUT}	OUT pin Voltage	-0.3 to 6.0	V
T _J	Junction Temperature	-40 to 150	°C
T _{STG}	Storage Temperature	-65 to 150	°C
V _{ESD}	Human Body Model ESD(JESD22-A114)	±2000	V
	Charged Device Model ESD(JESD22-C101)	±1000	
I _{LU}	Latch up Current Maximum Rating (JESD78E)	±200	mA

Note1: Refer to Electrical characteristics and Application Information for safe operating area.

Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
R _{θJA}	DFN4(1mm×1mm)	Thermal characteristics, Thermal Resistance, Junction-to-Air	250	°C/W
	SOT23-5		250	
P _D	DFN4(1mm×1mm)	Power Dissipation in Still Air at 25°C	400	mW
	SOT23-5		400	

Recommended Operating Conditions

Symbol	Parameters	Rating	Unit
V _{IN}	Input Voltage	2.0 to 5.5	V
I _{OUT}	Output Current	0 to 300	mA
T _A	Operating Ambient Temperature	-40 to 85	°C
C _{IN}	Effective Input Ceramic Capacitor Value	1.0 to 10	μF
C _{OUT}	Effective Output Ceramic Capacitor Value	1.0 to 10	μF
ESR	Input and Output Capacitor Equivalent Series Resistance (ESR)	5 to 100	mΩ

ET635XX

Electrical Characteristics

($V_{IN}=V_{OUT}+1V$, $V_{EN}=1.2V$, $I_{OUT}=1mA$, $C_{IN}=0.1\mu F$, $C_{OUT}=0.1\mu F$, $T_A=25^\circ C$, unless otherwise stated) ⁽²⁾

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage Range		2.0		5.5	V
I_{Q_ON}	Input Quiescent Current	Active mode: $V_{EN} = V_{IN}$		0.20		μA
I_{Q_OFF}	Input Shutdown Current	$V_{EN}=0V$		0.01		μA
V_{OUT}	Regulated Output Voltage	$I_{OUT} = 1mA$, $-40^\circ C \leq T_A \leq 85^\circ C$	-2		2	%
Reg_{LINE}	Line Regulation	$V_{IN}=V_{OUT}+1V$ to 5.5V, $I_{OUT}=10mA$		0.01	0.2	%/V
Reg_{LOAD}	Load Regulation	I_{OUT} from 0mA to 300mA		10	30	mV
V_{DROP}	Dropout Voltage	$V_{OUT} = 1.8V$, $I_{OUT} = 100mA$		135		mV
		$V_{OUT} = 1.8V$, $I_{OUT} = 300mA$		440		mV
		$V_{OUT} = 3.3V$, $I_{OUT} = 100mA$		100		mV
		$V_{OUT} = 3.3V$, $I_{OUT} = 300mA$		370		mV
I_{LIMIT}	Current Limit		300	550		mA
I_{SHORT}	Short Current Limit	$V_{OUT} = 0V$		80		mA
$PSRR^{(3)}$	Power Supply Rejection Ratio	$f = 1kHz$, $I_{OUT} = 20mA$		60		dB
		$f = 10kHz$, $I_{OUT} = 20mA$		48		dB
$e_N^{(3)}$	Output Noise	10Hz to 100kHz, $I_{OUT} = 20mA$, $V_{OUT} = 3.3V$		70		μV_{RMS}
V_{IL}	EN Low Threshold	$V_{IN} = 1.8V$ to 5.5V, V_{EN} falling until the output is disabled			0.4	V
V_{IH}	EN High Threshold	$V_{IN} = 1.8V$ to 5.5V, V_{EN} rising until the output is enabled	1.0			V
I_{EN}	EN Pin Input Current	$V_{EN} = 0V$		0	0.1	μA
R_{LOW}	Output Resistance of Auto Discharge at Off State	$V_{EN} = 0V$, $V_{IN} = 4V$, $I_{OUT} = 10mA$		80		Ω
T_{ON}	Soft-start Time	$V_{OUT} = 3.3V$		500		μs
$T_{TSD}^{(3)}$	Over-temperature Shutdown Threshold	T_J rising		150		$^\circ C$
$T_{HYS}^{(3)}$	Over-temperature Shutdown Hysteresis	T_J falling from shutdown		25		$^\circ C$

Note2: Production test at 25°C. Specifications over the temperature range are guaranteed by design and characterization.


Note3. Guaranteed by design and characterization. not a FT item.

ET635XX


Typical Characteristics

VOLTAGE VERSION 3.3V


($V_{IN}=4.3V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=0.1\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.)

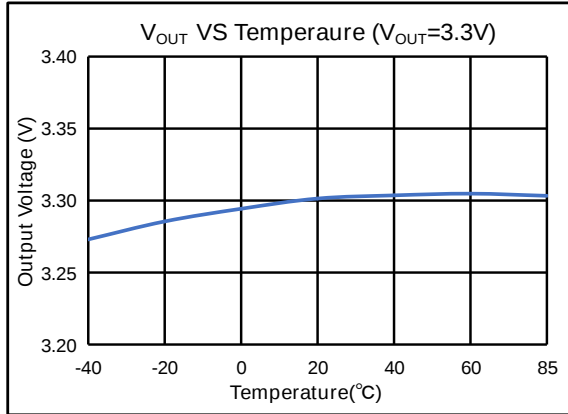


Output Voltage VS Temperature

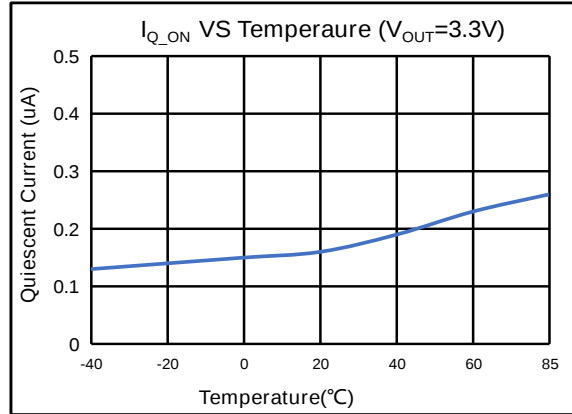


Quiescent Current VS Temperature

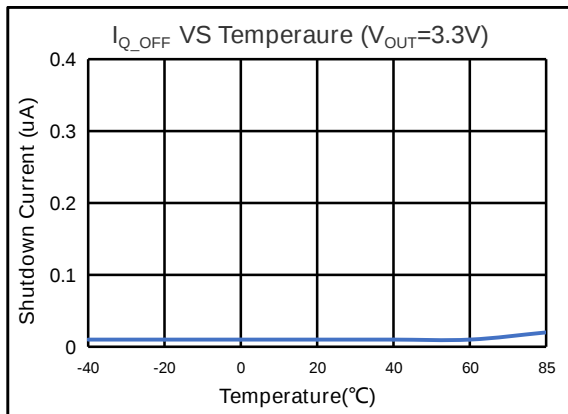


Standby Current VS Temperature

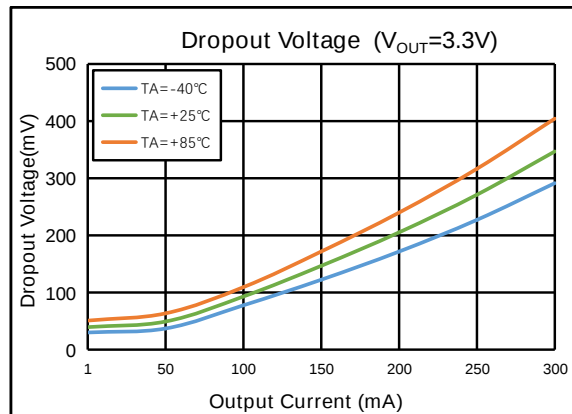

Dropout Voltage VS Output Current

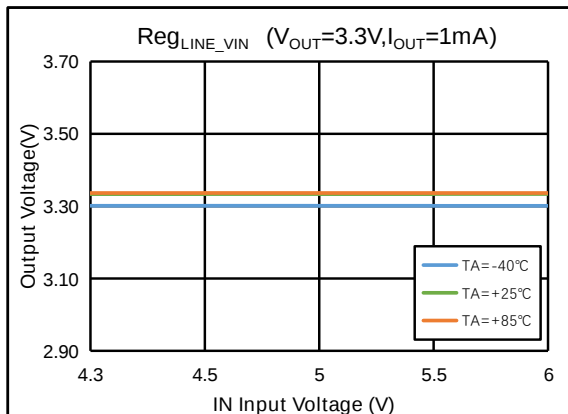


Output Voltage VS Input Voltage

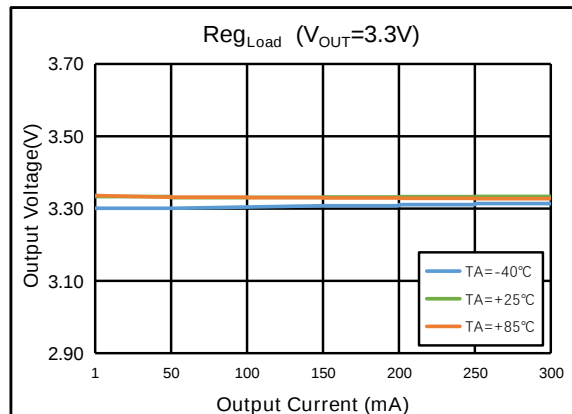


Output Voltage VS Output Current

ET635XX


Typical Characteristics (Continued)

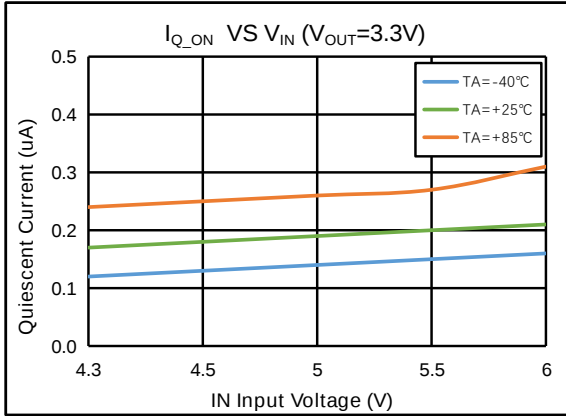


Supply Current VS Input Voltage

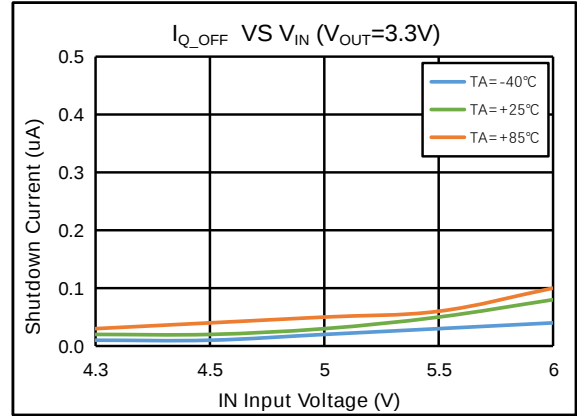


Shutdown Current VS Input Voltage

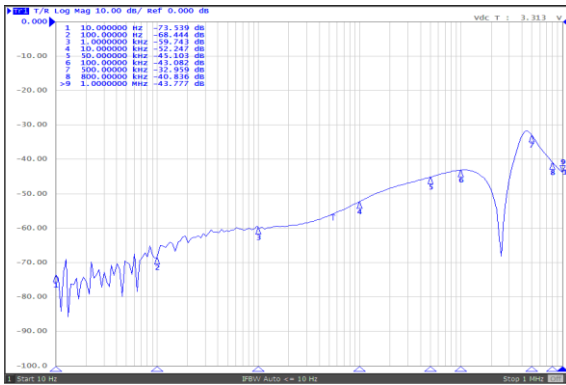

PSRR VS Output Current ($I_{OUT}=20mA$)

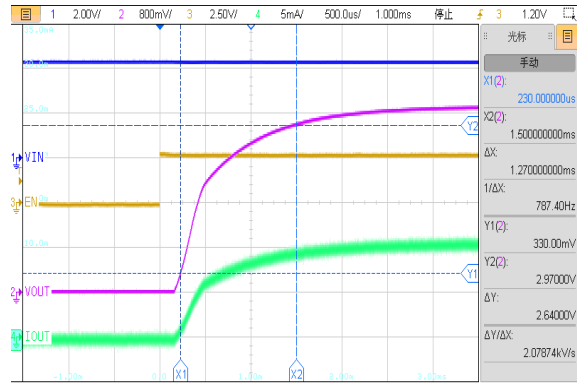


Turn On Speed VS EN Voltage ($I_{OUT}=20mA$)

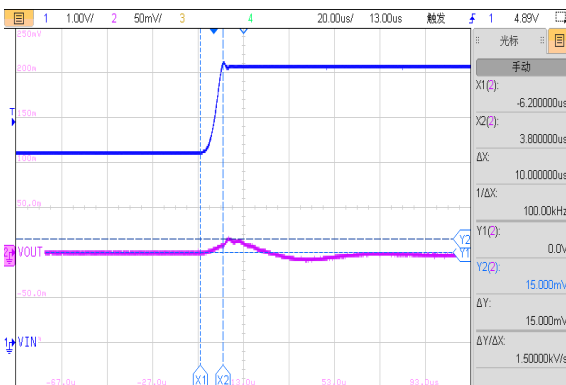

Line Transient Response

$V_{IN}=4.3V\sim 5.5V$, $V_{OUT}=3.3V$, $I_{OUT}=1mA$, $tr=10\mu s$


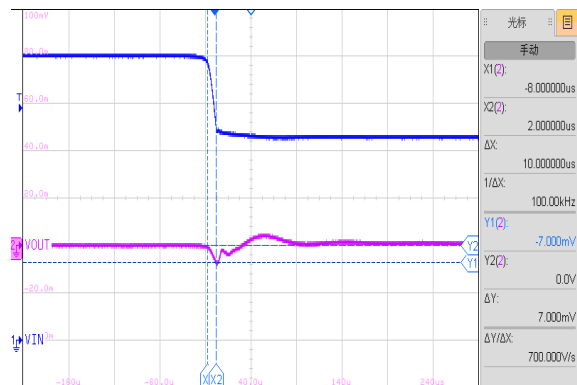


Line Transient Response


$V_{IN}=5.5V\sim 4.3V$, $V_{OUT}=3.3V$, $I_{OUT}=1mA$, $tf=10\mu s$

ET635XX

Typical Characteristics (Continued)

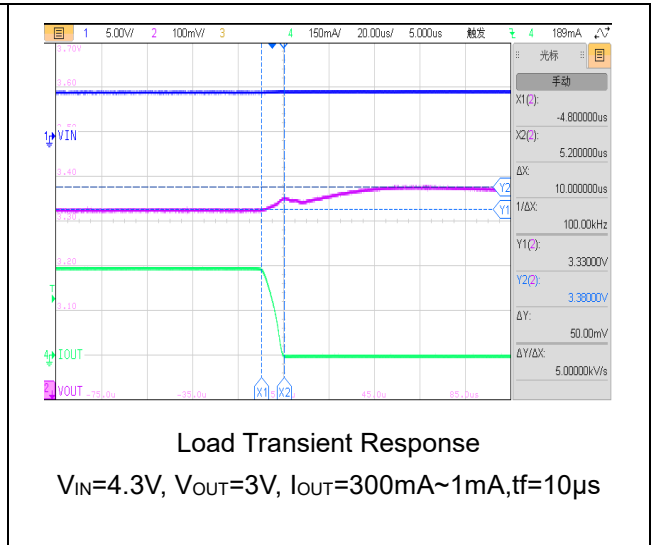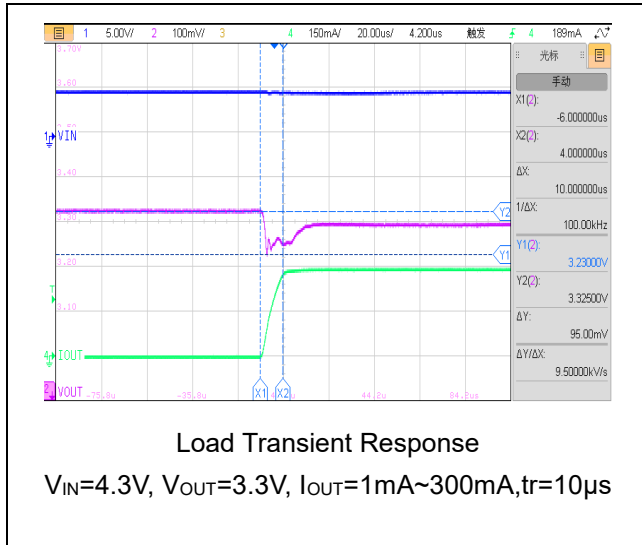


Application Circuits

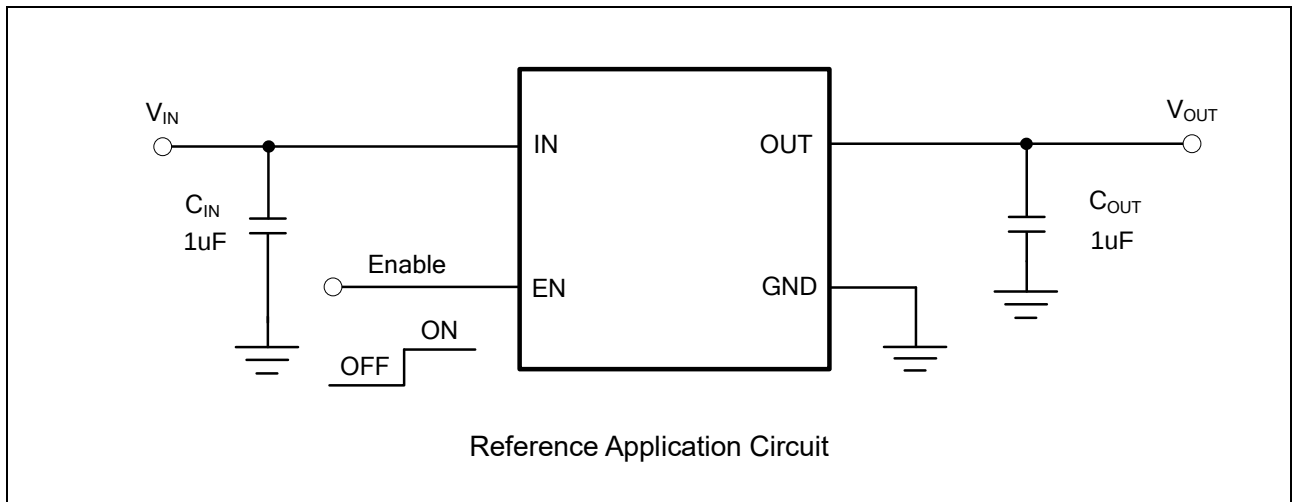


ET635XX

PCB Layout Guide

DFN4

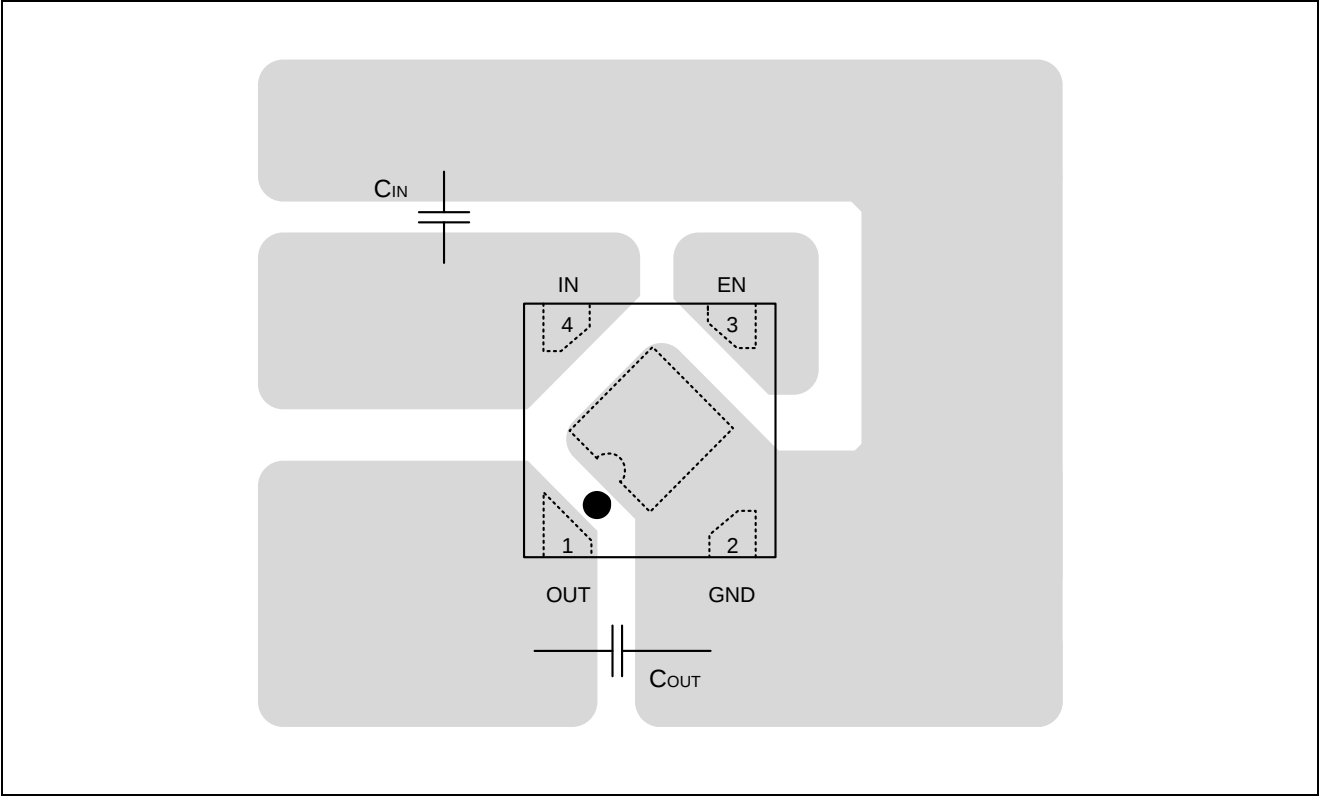




SOT23-5

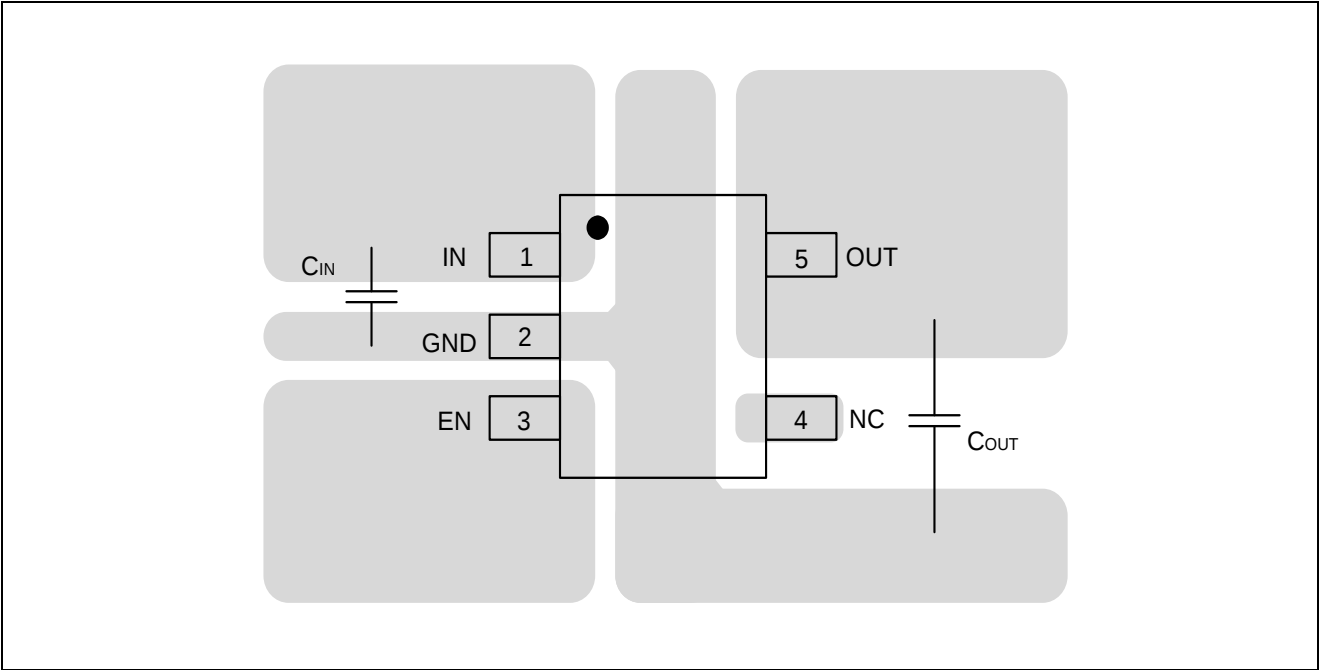

ET635XX


Package Dimension

DFN4(1.0×1.0)

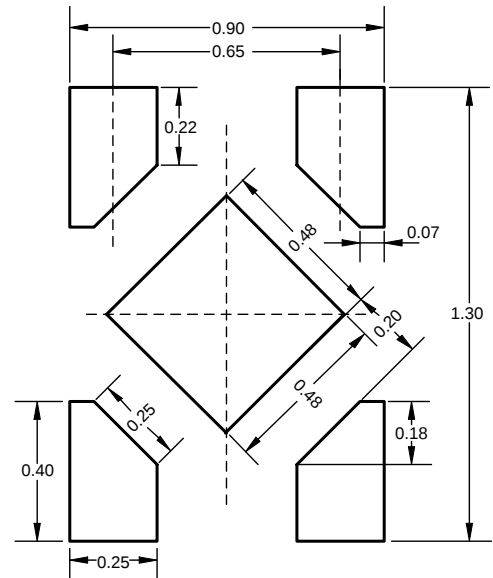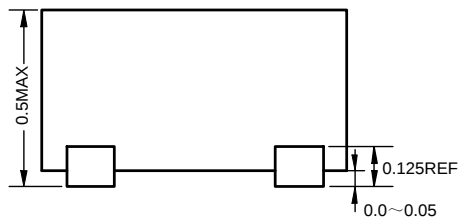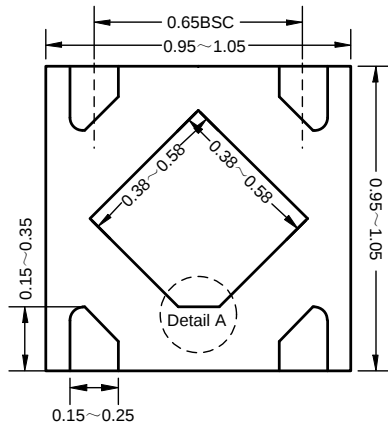

Recommended Land Pattern


Detail A: (PIN1 shape)

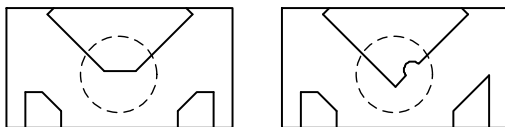

Unit: mm

ET635XX

SOT23-5 (2.926mm×2.800mm)

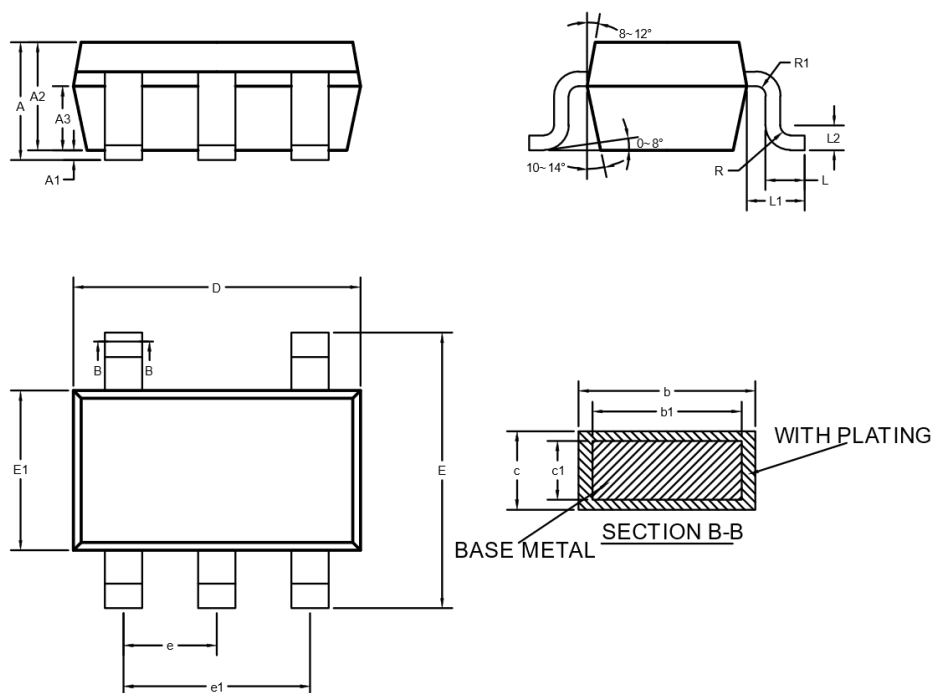

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	—	—	1.250
A1	0	—	0.150
A2	1.000	1.100	1.200
A3	0.600	0.650	0.700
b	0.360	—	0.450
b1	0.350	0.380	0.410
c	0.140	—	0.200
c1	0.140	0.150	0.160
D	2.826	2.926	3.026
E	2.600	2.800	3.000
E1	1.526	1.626	1.726
e	0.900	0.950	1.000
e1	1.800	1.900	2.000
L	0.300	0.300	0.500
L1	0.590REF		
L2	0.250BSC		
R	0.050	—	0.200
R1	0.050	—	0.200

SOT23-5 Package	DFN4 Package
6 = Part Number XX = V_{OUT} Version XXXXX = Track Number	X⁽¹⁾ = V_{OUT} Version X⁽²⁾ = Track Number

DFN4(1.0mm×1.0mm)

4.00±0.10

2.00±0.05

1.75±0.10

3.50±0.05

8.00^{+0.1}_{-0.1}

4.00±0.10

1.45±0.05

0.80±0.05

0.25±0.02

5° MAX

5° MAX

Pin1

A

A'

B

B'

Φ 1.50^{+0.1}_{-0.0}

Φ 0.50±0.05

Feeding direction

Section A-A'

Section B-B'

Unit : mm

Technical drawing of a mechanical part, showing a top view, a cross-section A-A', and a detail of Section B.

Top View Dimensions:

- Overall width: $8.00^{+0.30}_{-0.10}$
- Distance between first two circular features: 4.00 ± 0.10
- Distance between second and third circular features: 4.00 ± 0.10
- Distance between third and fourth circular features: 2.00 ± 0.05
- Distance between fourth and fifth circular features: 2.00 ± 0.05
- Distance between fifth and sixth circular features: 2.00 ± 0.05
- Distance from left edge to first circular feature: 4.00 ± 0.10
- Distance from right edge to last circular feature: 4.00 ± 0.10
- Radius of circular features: $\Phi 1.55 \pm 0.05$
- Radius of central slot: $\Phi 1.00^{+0.25}_{-0.00}$
- Distance from top edge to center of circular features: 1.75 ± 0.10
- Distance from bottom edge to center of circular features: 3.50 ± 0.05

Cross-section A-A' Dimensions:

- Top width: 3.23 ± 0.10
- Bottom width: 3.17 ± 0.10
- Height: 0.25 ± 0.02
- Angle: 9°MAX

Section B Dimensions:

- Top width: 3.17 ± 0.10
- Bottom width: 1.37 ± 0.10
- Height: 0.25 ± 0.02

Feeding direction: Indicated by an arrow pointing to the right.

Unit: mm

ET635XX

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
0.0	2024-11-30	Preliminary Version	Tugz	Liuxm	Liujiy
1.0	2025-02-19	Official Version	Pengjj	Liuxm	Liujiy
1.1	2025-07-22	Update V _{IN} Range	Pengjj	Liuxm	Liujiy