ET5H2XX - High Input Very-Low I_Q 300mA LDO

General Description

ET5H2XX series are the high input very low IQ 300mA LDO with enable function that operates from 1.8V~5V, is designed specifically for portable battery-powered applications which require ultra-low quiescent current. The very-low consumption of type 2.5μA ensures long battery life and dynamic transient boost feature improves device transient response for wireless communication applications.

ET5H2XX series are offered SOT89-3, SOT89-5, SOT23-5, SOT23-3, DNF4(1mm × 1mm) packages

Features


- Wide Input Voltage Range from 2.5V to 36V
- Up to 300mA Load Current
- Very Low I_Q is 2.5μA Typical
- Fixed Output Voltage are 1.8V,2.5V,2.8V,3.0V,3.3V,3.6V,4.2V,5V, etc.
- Low Dropout is 1000mV at 300mA Load @V_{OUT} = 3.3V
- Excellent Load/Line Transient Response
- High Ripple Rejection: 60dB at 1KHz
- Part No. and Package Information

Part No.	Package	Packing Option	MSL
ET5H2XXB	SOT89-3	Tape and Reel, 1K/Reel	3
ET5H2XXF		Tape and Reel, 1K/Reel	3
ET5H2XXC	SOT89-5	Tape and Reel, 1K/Reel	3
ET5H2XXS	SOT23-3	Tape and Reel, 3K/Reel	3
ET5H2XXT	SOT23-5	Tape and Reel, 3K/Reel	3
ET5H2XXE		Tape and Reel, 3K/Reel	3
ET5H2XXL		Tape and Reel, 3K/Reel	3
ET5H2XX	SOT23-5 (Default)	Tape and Reel, 3K/Reel	3
ET5H2XXY	DFN4	Tape and Reel, 10K/Reel	1


Mark Specification Label

Part No.	Marking									V_{OUT}
	SOT89-3		SOT89-5	SOT23-3	DFN4	SOT23-5				
	XXB	XXF	XXC	XXS	XXY	XX	XXT	XXE	XXL	
ET5H218	18B	18F	18C	18S	CX	18	18T	18E	18L	1.8V
ET5H225	25B	25F	25C	25S	FX	25	25T	25E	25L	2.5V
ET5H228	28B	28F	28C	28S	DX	28	28T	28E	28L	2.8V
ET5H230	30B	30F	30C	30S	GX	30	30T	30E	30L	3.0V
ET5H233	33B	33F	33C	33S	EX	33	33T	33E	33L	3.3V
ET5H236	36B	36F	36C	36S	RX	36	36T	36E	36L	3.6V
ET5H242	42B	42F	42C	42S	dX	42	42T	42E	42L	4.2V
ET5H250	50B	50F	50C	50S	ZX	50	50T	50E	50L	5.0V


Pin Configuration




ET5H2XXB (SOT89-3)




ET5H2XXF (SOT89-3)




ET5H2XXC (SOT89-5)




ET5H2XXS (SOT23-3)




ET5H2XXY (DFN4)

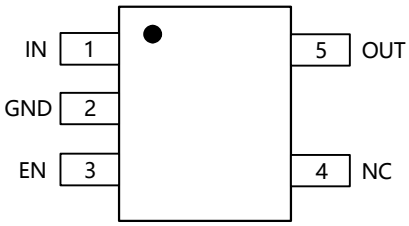


ET5H2XX (SOT23-5)

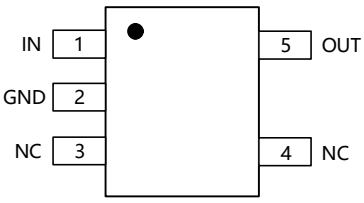

ET5H2XXT (SOT23-5)



ET5H2XXE (SOT23-5)

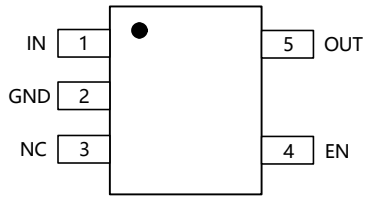

ET5H2XXL (SOT23-5)

TOP VIEW

Figure 1. Pin Configuration

Pin Function

Pin No.									Pin Name	Pin Function
SOT89-3		SOT89-5	SOT23-3	DFN4	SOT23-5					
XXB	XXF	XXC	XXS	XXY	XX	XXT	XXE	XXL		
1	2	2	1	2	2	2	1	2	GND	Ground.
2	3	5	3	4	1	1	2	1	IN	Supply Input Pin.
3	1	1	2	1	5	5	3	5	OUT	Output Pin.
		3		3	3			4	EN	Enable Control Input, Active High.
		4			4	3, 4	4, 5	3	NC	No Connection.

Block Diagram

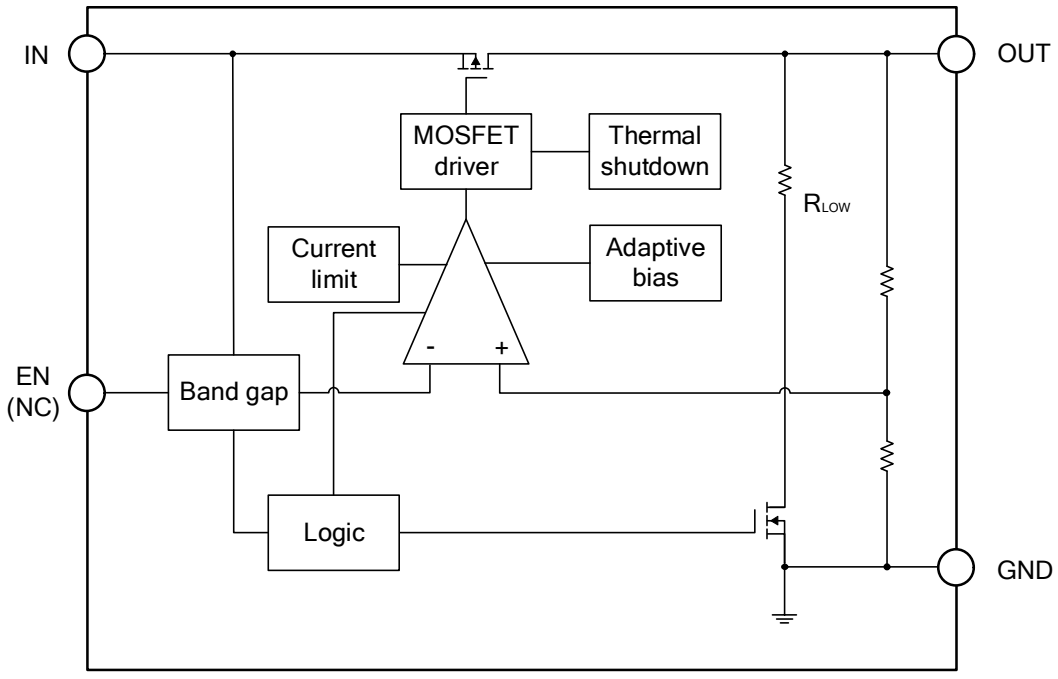


Figure 2. Block Diagram

Functional Description

Input Capacitor

A 1μF~10μF ceramic capacitor is recommended to connect between IN and GND pins to decouple input power supply glitch and noise. The amount of the capacitance may be increased without limit. This input capacitor must be located as close as possible to the device to assure input stability and less noise. For PCB layout, a wide copper trace is required for both IN and GND.

Output Capacitor

An output capacitor is required for the stability of the LDO. The recommended output capacitance is from 1μF to 10μF, Equivalent Series Resistance (ESR) is from 5mΩ to 100mΩ, and temperature characteristics are X7R or X5R. Higher capacitance values help to improve load/line transient response. The output capacitance may be increased to keep low undershoot/overshoot. Place output capacitor as close as possible to OUT and GND pins.

Enable (If EN Pin Exist)

The ET5H2XX delivers the output power when it is set to enable state. When it works in disable state, there is no output power and the operation quiescent current is almost zero. The enable pin (EN) is active high.

Dropout Voltage

The ET5H2XX uses a PMOS pass transistor to achieve low dropout. When (V_{IN} – V_{OUT}) is less than the dropout voltage (VDO), the PMOS pass device is in the linear region of operation and the input-to-output resistance is the $R_{DS(ON)}$ of the PMOS pass element. VDO scales approximately with output current because the PMOS device behaves like a resistor in dropout mode. As with any linear regulator, PSRR and transient response degrade as (V_{IN} – V_{OUT}) approaches dropout operation.

Thermal Shutdown

Thermal shutdown protection disables the output when the junction temperature rises to approximately 155°C.Disabling the device eliminates the power dissipated by the device, allowing the device to cool. When the junction temperature cools to approximately 125°C, the output circuitry is again enabled.

Depending on power dissipation, thermal resistance, and ambient temperature, the thermal protection circuit may cycle on and off. This cycling limits regulator dissipation, protecting the LDO from damage as a result of overheating. Activating the thermal shutdown feature usually indicates excessive power dissipation as a result of the product of the (V_{IN} – V_{OUT}) voltage and the load current. For reliable operation, limit junction temperature to 125°C maximum.

Thermal Considerations

For continuous operation, do not exceed absolute maximum junction temperature. The maximum power dissipation depends on the thermal resistance of the IC package, PCB layout, rate of surrounding airflow, and difference between junction and ambient temperature. The maximum power dissipation can be calculated by the following formula:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA}$$

where $T_{J(MAX)}$ is the maximum junction temperature, T_A is the ambient temperature, and θ_{JA} is the junction to ambient thermal resistance.

For recommended operating conditions the maximum junction temperature is 150°C and T_A is the ambient temperature. The junction to ambient thermal resistance (θ_{JA}) is layout dependent.

For SOT89-3 package, the thermal resistance (θ_{JA}) is135°C/W on the test board. The maximum power dissipation at T_A = 25°C can be calculated by the following formula:

$P_{D(MAX)}$ = (150°C - 25°C) / (135°C/W) = 0.925W for SOT89-3 package

The maximum power dissipation depends on the operating ambient temperature for fixed $T_{J(MAX)}$ and thermal resistance (θ_{JA}). The derating curve in Figure 6 allows the designer to see the effect of rising ambient temperature on the maximum power dissipation.

Current-Limit Protection

The ET5H2XX provides current limit function to prevent the device from damages during over-load or shorted-circuit condition. This current is detected by an internal sensing transistor.

Layout Guidelines

- Place input and output capacitors as close to the device as possible.
- Use copper planes for device connections in order to optimize thermal performance.
- Place thermal vias around the device to distribute heat.
- Do not place a thermal via directly beneath the thermal pad. A via can wick solder or solder paste away from the thermal pad joint during the soldering process, leading to a compromised solder joint on the thermal pad.

Absolute Maximum Ratings

Symbol	Rating	Value	Unit
V_{IN}	Input Voltage[1]	-0.3~44	V
V_{OUT}	Output Voltage	-0.3~6	V
V_{EN}	Chip Enable Input (If EN Pin Exist)	-0.3~44	V
$T_{J(MAX)}$	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature	-65~150	°C
V_{ESD} [2]	HBM Capability	±2000	V
	CDM Capability	±1500	V
I_{LU} [2]	Latch up Current Maximum Rating	±200	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Note1: Refer to Electrical Characteristics and Application Information for Safe Operating Area.

Note2: This device series incorporates ESD protection and is tested by the following methods:

ESD Human Body Model tested per JEDEC JS-001;

CDM tested per JEDEC JS-002;

Latch up Current Maximum Rating tested per JEDEC JESD78F.

Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
$R_{\theta JA}$	SOT89-3	Thermal Characteristics, Thermal Resistance, Junction-to-Air	135	°C/W
	SOT89-5		125	
	SOT23-5		250	
	SOT23-3		360	
	DFN4		250	
P_D	SOT89-3	Power Dissipation @25°C PCB Board Dimension: 40mm x 40mm (2layer) Copper :1OZ	920	mW
	SOT89-5		1000	
	SOT23-5		500	
	SOT23-3		350	
	DFN4		500	

Recommended Operating Conditions

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	2.5 to 36	V
I_{OUT}	Output Current	0 to 300	mA
T_J	Operating Junction Temperature	-40 to 125	°C
C_{IN}	Effective Input Ceramic Capacitor Value	1 to 10	μF
C_{OUT}	Effective Output Ceramic Capacitor Value	1 to 10	μF
ESR	Input and Output Capacitor Equivalent Series Resistance (ESR)	5 to 100	mΩ

Electrical Characteristics

(V_{IN} = V_{OUT} + 2V; I_{OUT} = 1mA, C_{IN} = C_{OUT} = 1.0μF, unless otherwise noted. Typical values are at T_A = +25°C.)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_{IN}	Operating Input Voltage (3)		2.5		36	V
V_{OUT}	Output Voltage	I_{OUT} = 1mA, 25°C	-2%		+2%	V
		I_{OUT} = 1mA, -40~125°C	-3%		+3%	
I_Q	Quiescent Current	I_{OUT} = 0mA, 25°C		2.5	4.5	μA
I_{Q_OFF}	Standby Current	V_{EN} = 0V (If EN Pin Exist), 25°C		0.1	1	μA
$Line_{REG}$	Line Regulation (6)	V_{IN} = V_{OUT} + 2V to 36V, I_{OUT} = 10mA （ΔV_{OUT} / ΔV_{IN} / V_{OUT}）		0.05	0.20	%/V
$Load_{REG}$	Load Regulation (6)	1mA ≤ I_{OUT} ≤ 300mA, V_{IN} = V_{OUT} + 2V			40	mV
V_{DROP}	Dropout Voltage I_{OUT}=300mA (4) (6)	V_{OUT} = 1.8V		1350	1650	mV
		V_{OUT} = 2.5V		1150	1450	
		V_{OUT} = 2.8V		1100	1400	
		V_{OUT} = 3.0V		1050	1350	
		V_{OUT} = 3.3V		1000	1300	
		V_{OUT} = 3.6V		950	1250	
		V_{OUT} = 4.2V		950	1250	
		V_{OUT} = 5V		900	1200	
I_{LMT}	Current Limit	V_{IN} = V_{OUT} + 2V	350	450		mA
V_{IH}	EN Pin Threshold Voltage	EN Input Voltage “H” (If EN Pin Exist)	1.2			V
V_{IL}	EN Pin Threshold Voltage	EN Input Voltage “L” (If EN Pin Exist)			0.4	V
I_{EN}	EN Pin Current	V_{EN} = 0~36V (If EN Pin Exist)		1		uA
PSRR	Power Supply Rejection Ratio (5)	f = 1kHz, V_{IN} = V_{OUT} + 1V I_{OUT} = 20mA		60		dB
e_N	Output Noise Voltage (5)	V_{IN} = V_{OUT} + 2V, I_{OUT} = 1mA, f = 10Hz to 100KHz, V_{OUT} = 3V, C_{OUT} = 1μF		100		μVrms
T_{SD}	Thermal Shutdown Temperature (5)	Temperature Increasing from T_A = +25°C		155		°C
T_{SDH}	Thermal Shutdown Hysteresis (5)	Temperature Falling from TSD		30		°C

Note3: Here V_{IN} means internal circuit can work normal. If $V_{IN} < V_{OUT}$, Output voltage follows V_{IN} (I_{OUT} = 1mA), circuit is safety.

Note4: V_{DROP} FT test method: test the V_{OUT} voltage at $V_{SET} + V_{DROPMAX}$ with 300mA output current.

Note5: Guaranteed by design and characterization. Not a FT item.


Note6: At high temperatures, the maximum load current can be calculated according to the following formula：

$$\mathbf{I_{OUT_MAX} = (T_J - T_A) / R_{\theta JA} / (V_{IN} - V_{OUT})}$$


Typical Characteristics

VOLTAGE VERSION 3.3V


(V_{IN} = 5.3V, I_{OUT} = 1mA, C_{IN} = C_{OUT} = 1.0μF, Typical values are at T_A = 25°C, unless otherwise noted.)

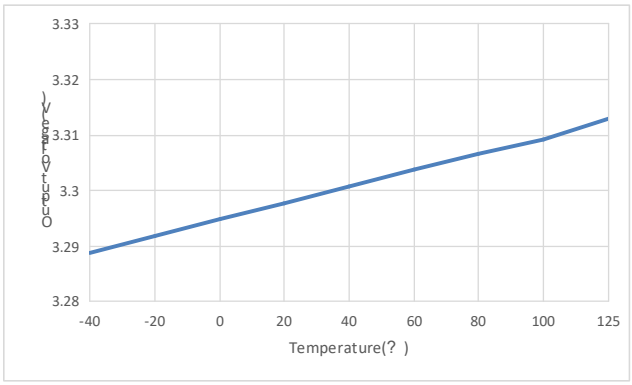


Output Voltage VS Temperature

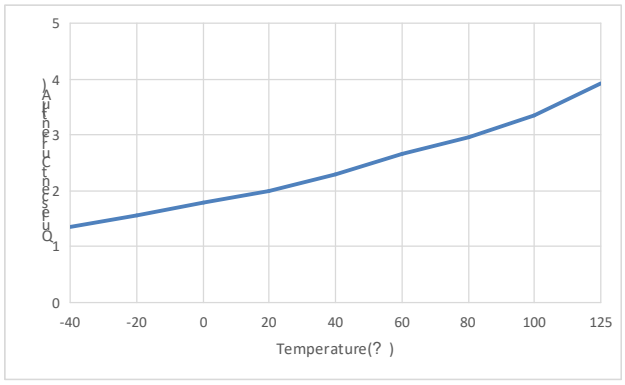


Quiescent Current VS Temperature

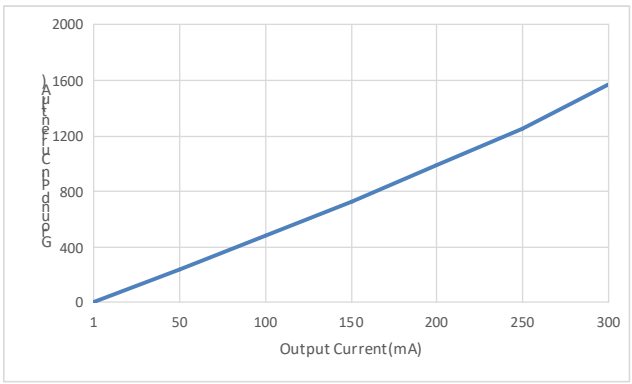


Ground Pin Current VS Output Current

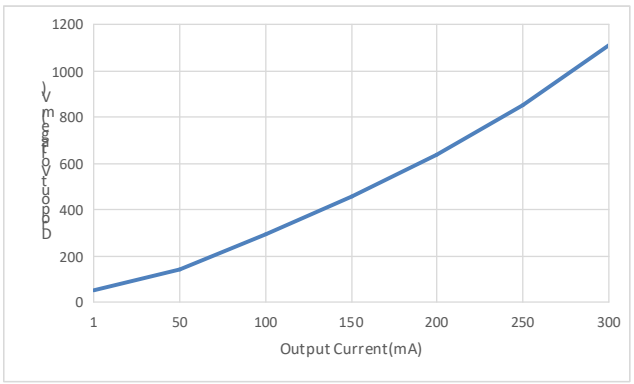


Dropout Voltage VS Output Current

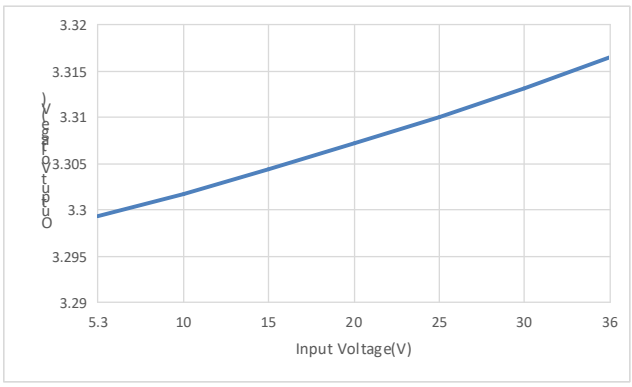


Output Voltage VS Input Voltage

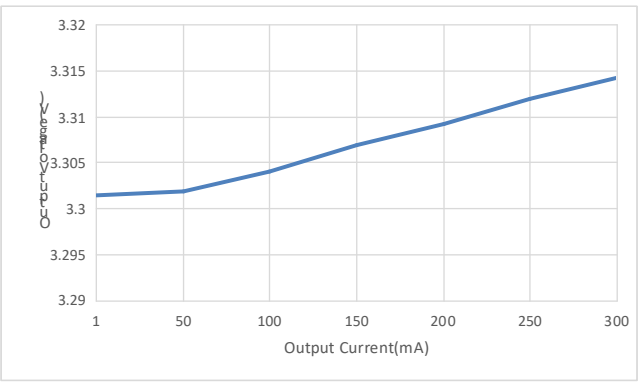


Output Voltage VS Output Current

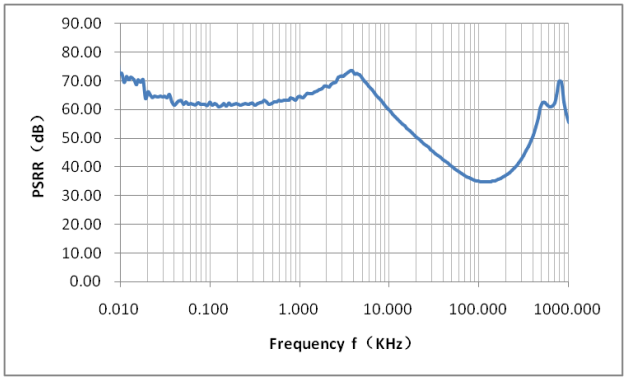


PSRR

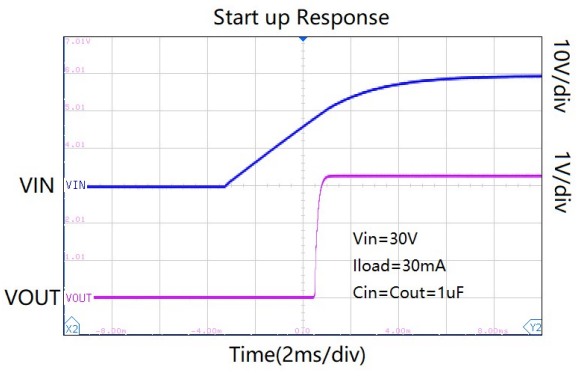

Start-up Response

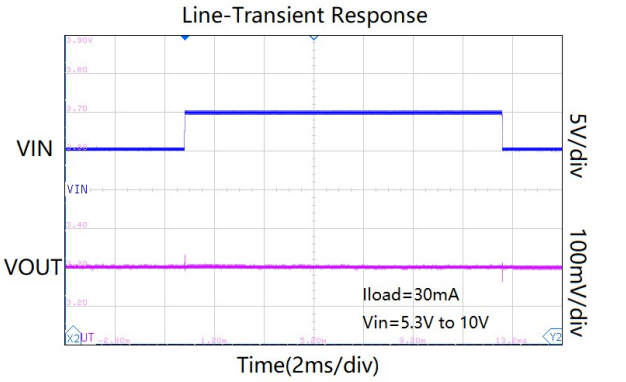

Line-Transient Response

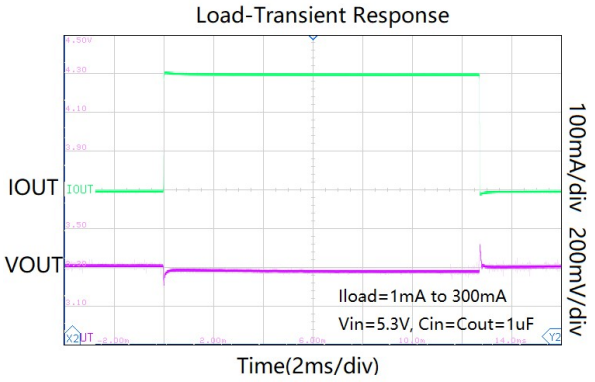

Load-Transient Response

Application Circuits


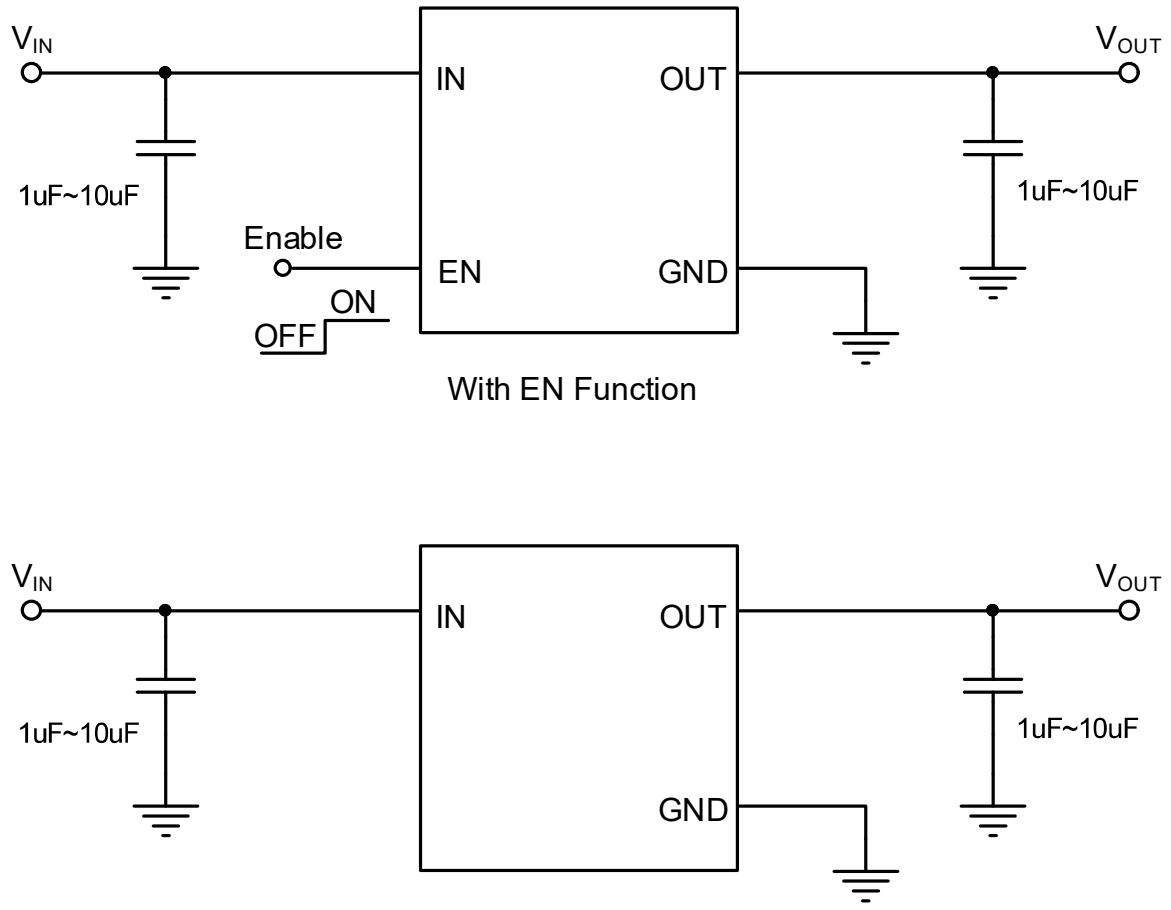


Figure 3. Application Circuits

Package Dimension


SOT89-3

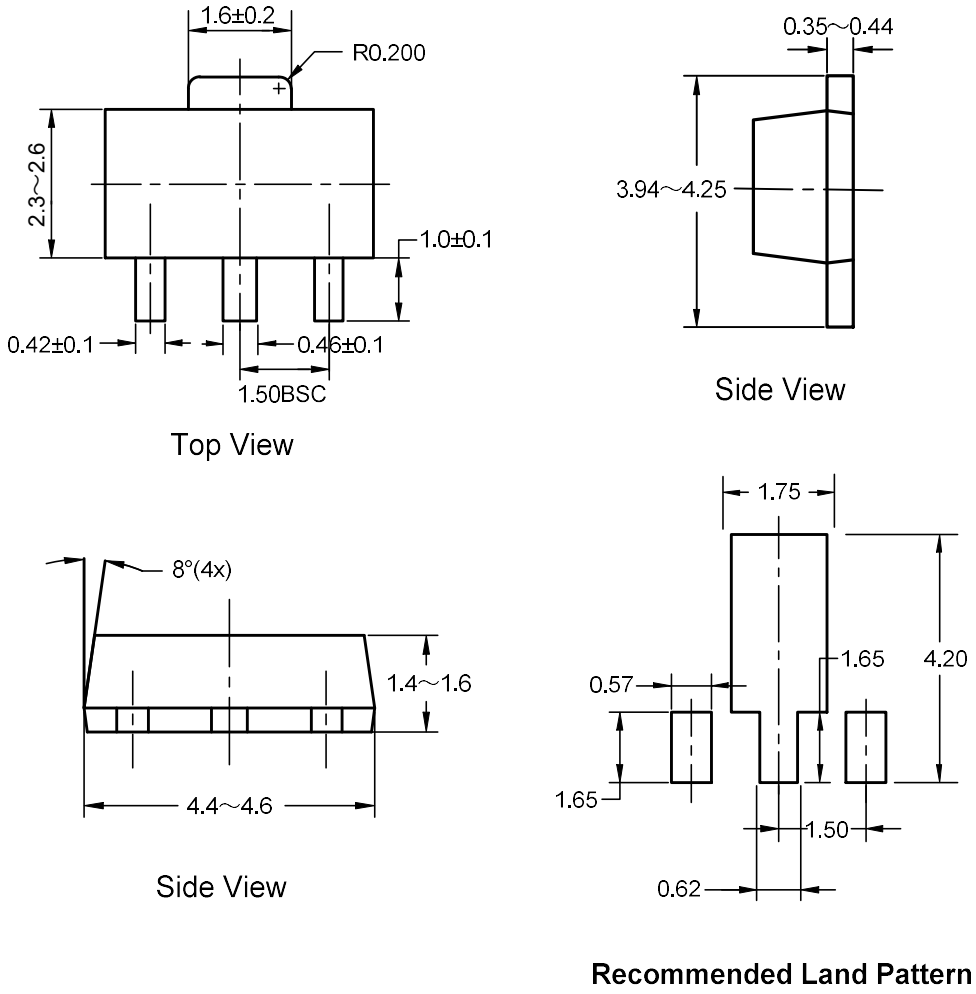

Unit: mm

Figure 4. SOT89-3 Package Dimension


SOT89-5

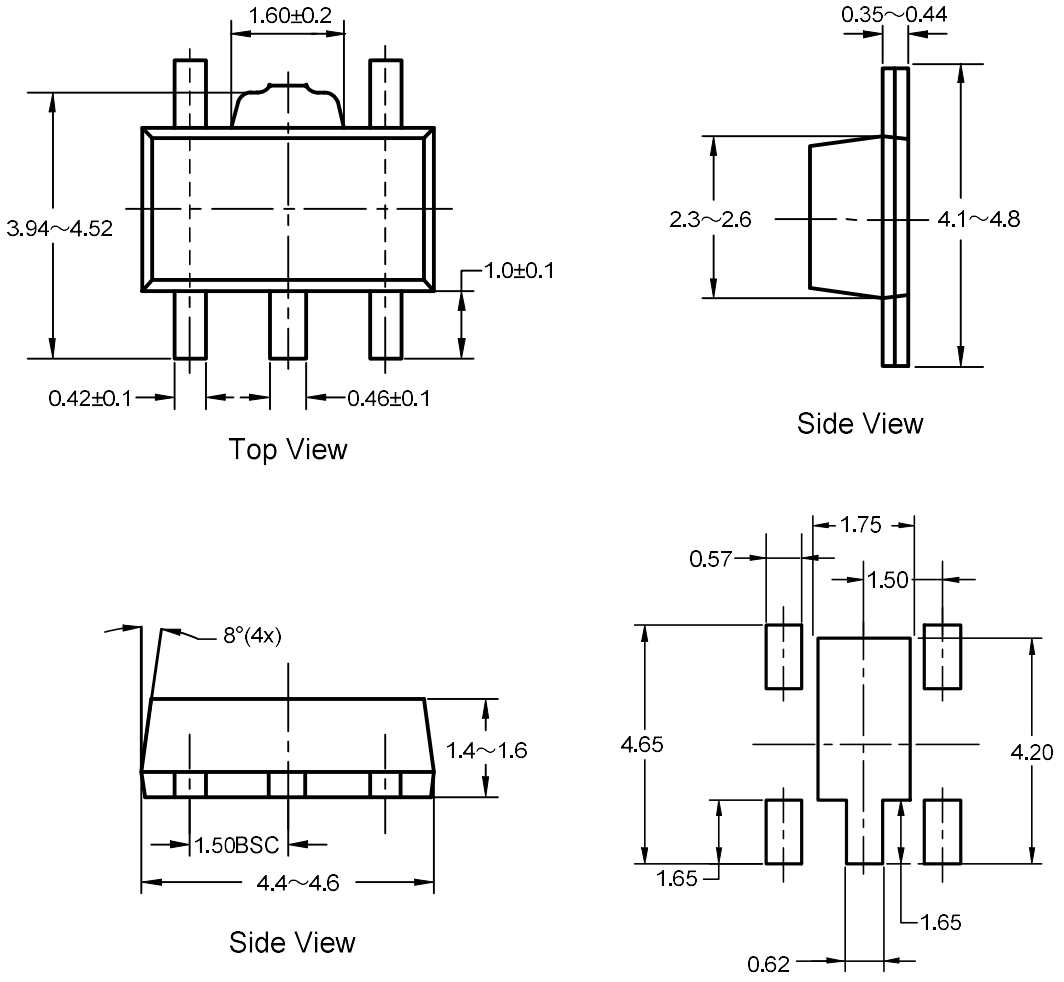

Unit: mm

Figure 5. SOT89-5 Package Dimension

SOT23-3

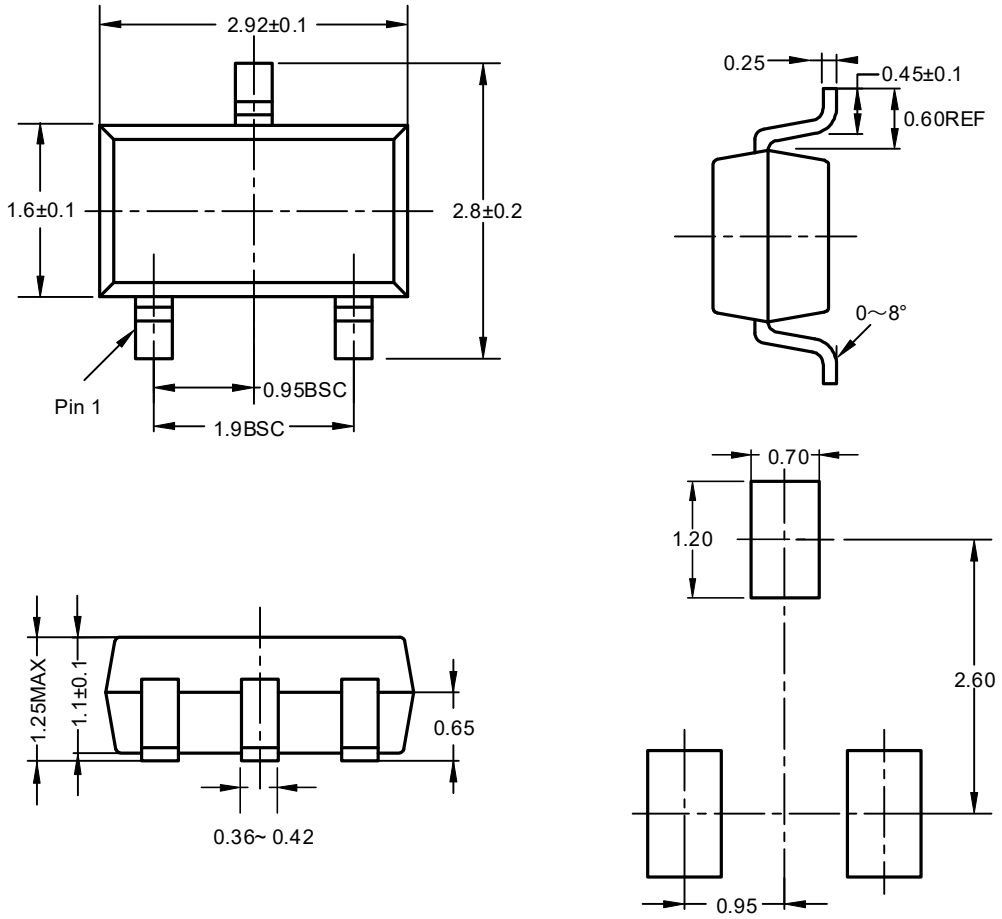


Recommended Land Pattern

Unit: mm

Figure 6. SOT23-3 Package Dimension

SOT23-5

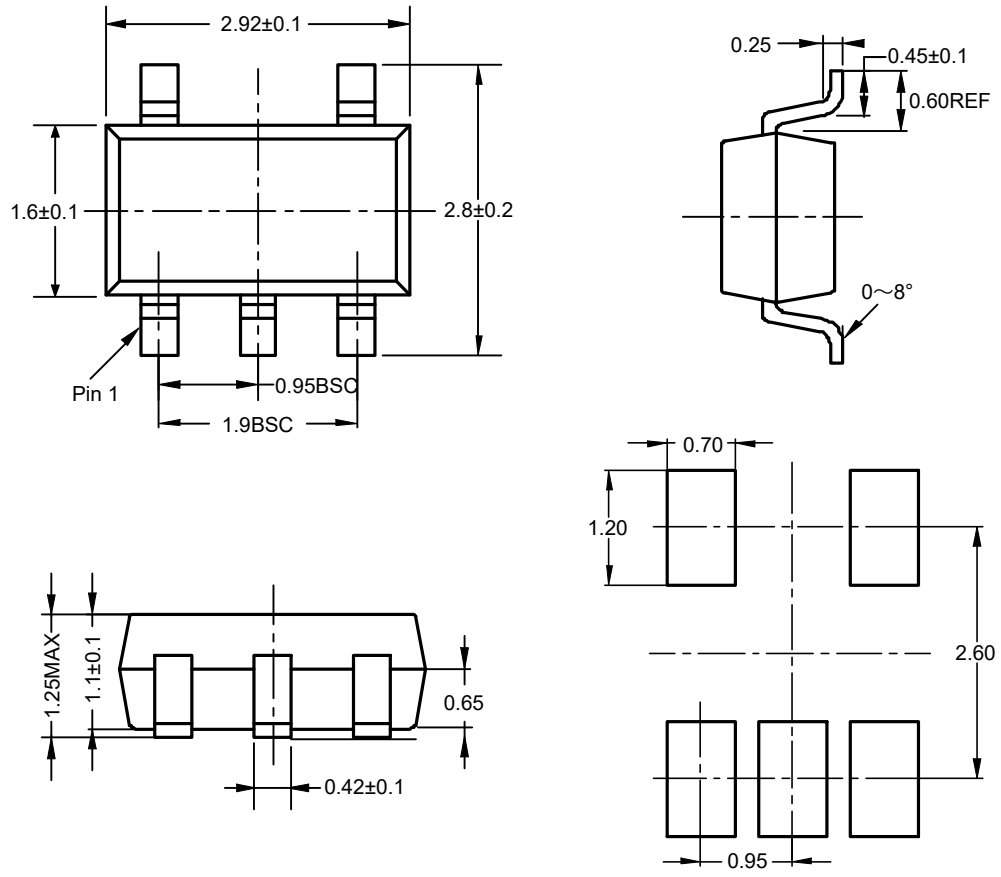


Recommended Land Pattern

Unit: mm


Figure 7. SOT23-5 Package Dimension

DFN4(1mm × 1mm)

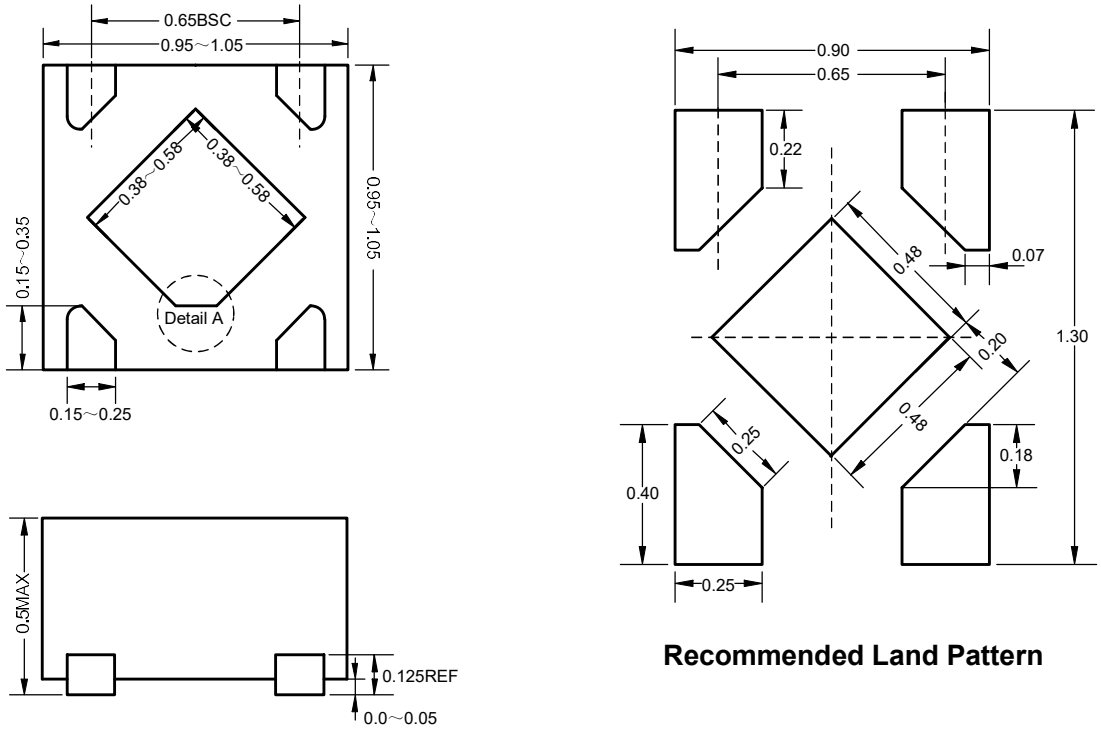

Recommended Land Pattern

Detail A: (PIN1 shape)

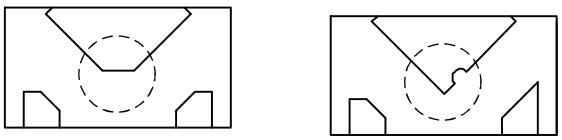

Unit: mm

Figure 8. DFN4 Package Dimension

Tape Information

SOT89-3

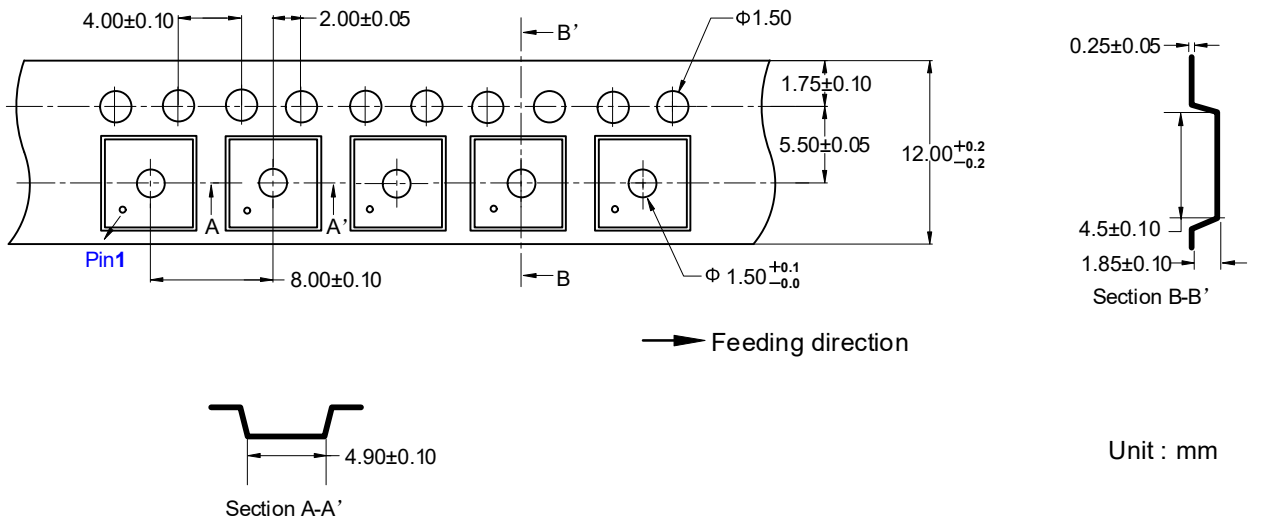


Figure 9. SOT89-3 Tape Information

SOT89-5

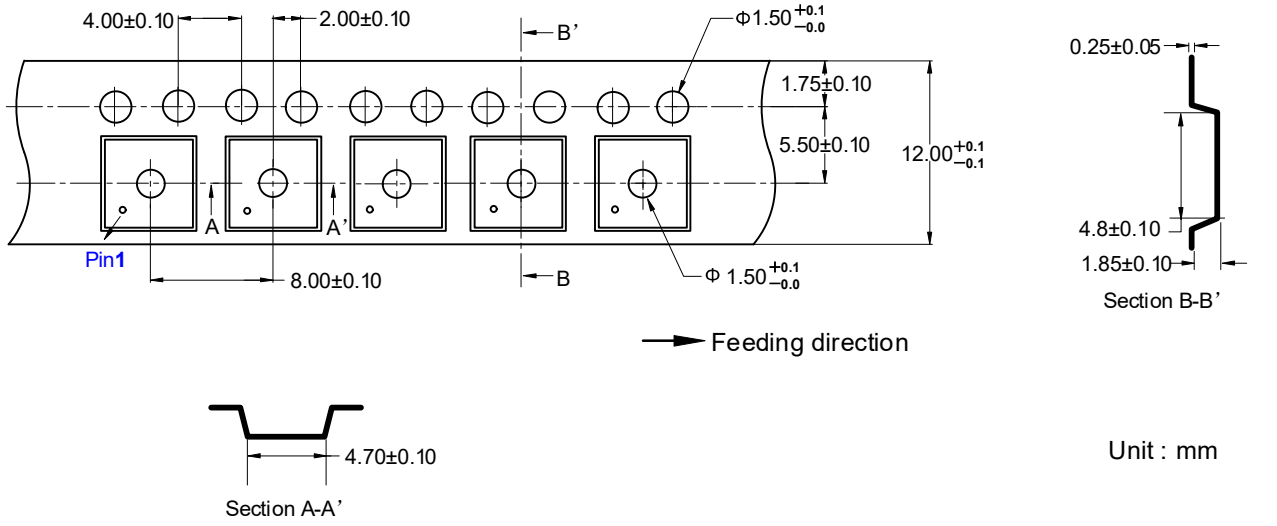


Figure 10. SOT89-5 Tape Information

SOT23-3

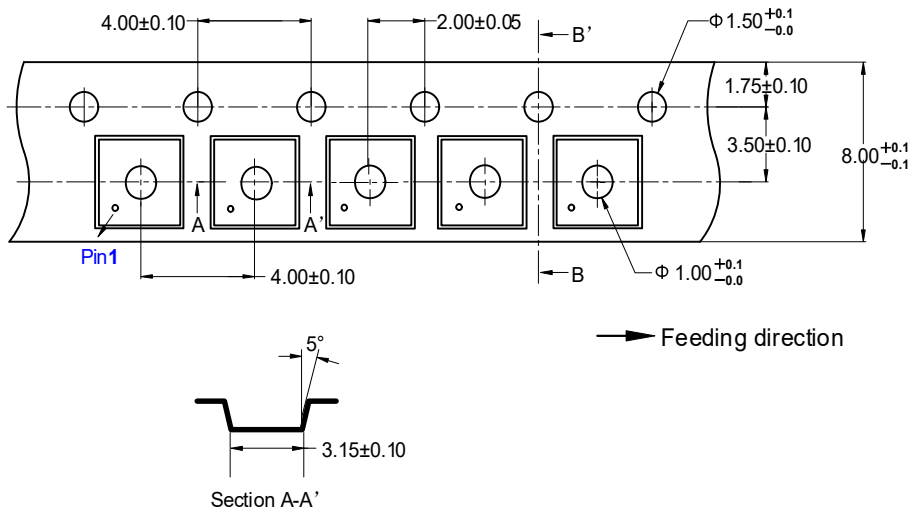


Figure 11. SOT23-3 Tape Information

SOT23-5

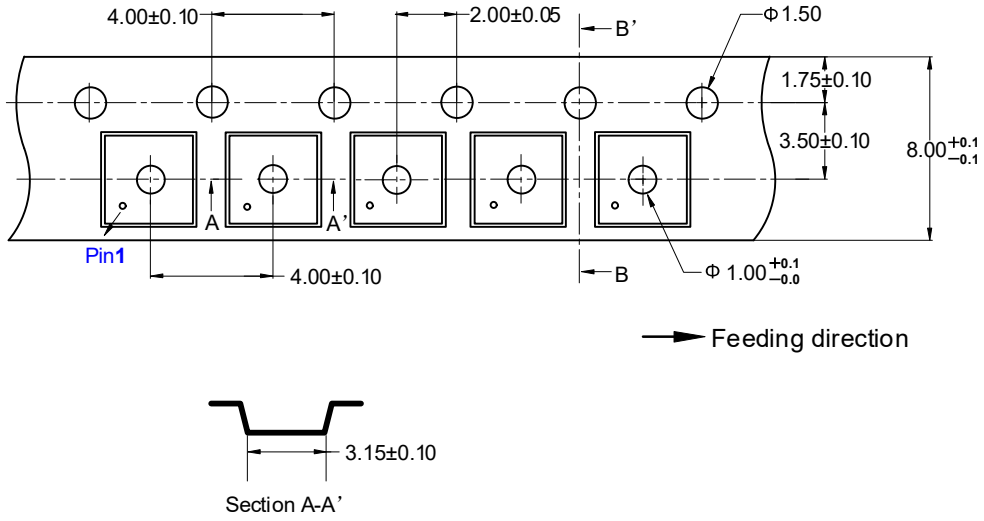


Figure 12. SOT23-5 Tape Information

DFN4


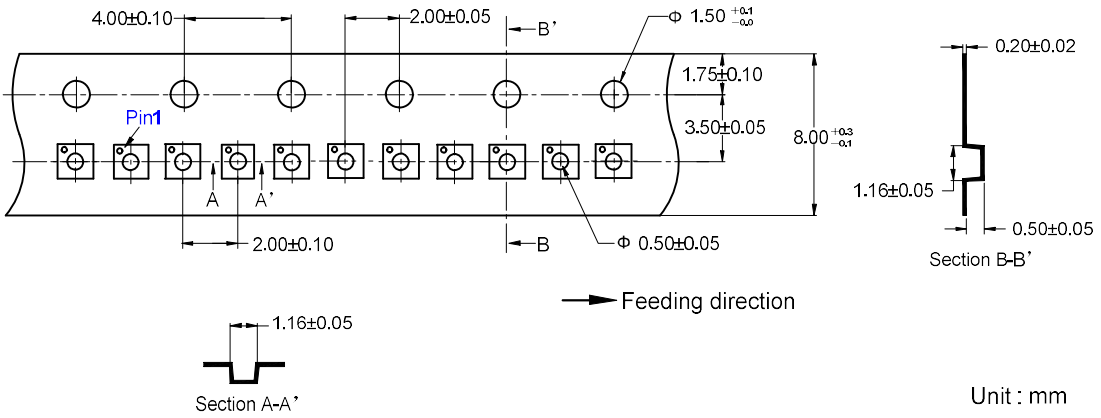


Figure 13. DEN4 Tape Information

Marking Information

SOT89-3

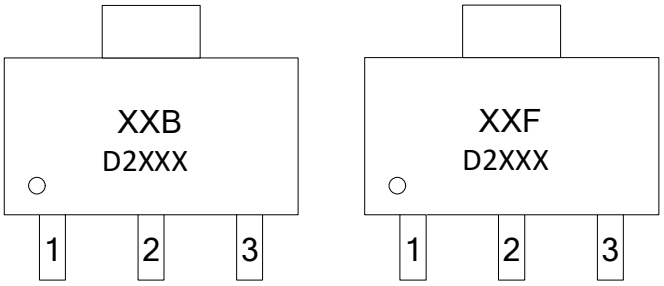


XXB/XXF – Part Number

D2XXX – Tracking Number


Figure 14. SOT89-3 Marking Information

SOT89-5




XXC – Part Number
D2XXX – Tracking Number
Figure 15. SOT89-5 Marking Information

SOT23-3



XXS – Part Number
D2XXX – Tracking Number
Figure 16. SOT23-3 Marking Information

SOT23-5

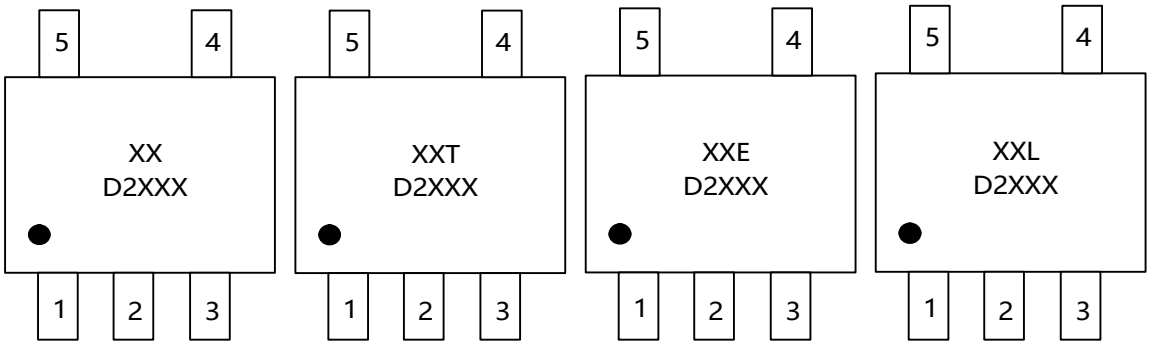


XX/XXT/XXE/XXL – Part Number

D2XXX – Tracking Number

Figure 17. SOT23-5 Marking Information

DFN4



X – V_{OUT} Version

X – Tracking Number

Figure 18. DFN4 Marking Information

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
0.0	2019-05-13	Preliminary Version	Liuxm	Liuxm	Zhujl
1.0	2019-10-22	Released Version	Liuxm	Liuxm	Zhujl
1.1	2019-11-12	Add SOT89-5 Packge	Liuxm	Liuxm	Zhujl
1.2	2019-12-13	Update EC Table	Liuxm	Liuxm	Liujy
1.3	2020-03-16	Document Check and Formalize	Shib	Shib	Liujy
1.4	2020-11-26	Update Table	Shib	Shib	Liujy
1.5	2020-12-7	Add 3.6V Voltage	Shib	Shib	Liujy
1.6	2021-6-4	Add New Package Type	Liuxm	Liuxm	Zhujl
1.7	2022-3-4	Update Marking Information	Liuxm	Liuxm	Liujy
1.8	2023-4-5	Update Typeset	Shib	Liuxm	Liujy
1.9	2025-5-23	SOT23 Pin Number Sorting	Shib	Liuxm	Liujy
2.0	2025-07-01	Add Packing Option	Yangxx	Liuxm	Liujy
2.1	2025-10-14	Update T_J Range	Yangxx	Liuxm	Liujy
2.2	2025-11-14	Add 4.2V Voltage	Pengjj	Liuxm	Liujy
2.2.1	2025-11-24	Update Thermal Characteristics	Pengjj	Liuxm	Liujy
2.3	2026-10-22	Update SOT23-3 PD	Yangxx	Liuxm	Liujy