High-Speed USB 2.0(480Mbps) Switch

General Description

The ET7222 is a 2CH single-pole/double-throw (SPDT) switches. Their wide bandwidth and low bit-to-bit skew allow them to pass high-speed differential signals with good signal integrity.

Each switch is bidirectional and offers little or no attenuation of the high-speed signals at the outputs. Industry-leading advantages include a propagation delay of less than 250 ps, resulting from its low channel resistance and low I/O capacitance. Their high channel-to-channel crosstalk rejection results in minimal noise interference. Their bandwidth is wide enough to pass High-Speed USB 2.0 differential signals (480 Mb/s).

ET7222 is offered in a QFN10L and MSOP10 package.

Features


- R_{ON} is typically 6.0 Ω @ V_{CC} = 3.3 V
- Low Bit-to-Bit skew is typically 50 ps
- Low crosstalk is typical -37 dB @ 250 MHz
- Low current consumption is 1.0 μA max
- Near-zero propagation delay is typical 250 ps
- Channel on-capacitance is 8.0 pF typical
- V_{CC} Operating Range from 1.65 V to 4.7 V
- ≥ 750 MHz bandwidth (or data frequency)
- Part No. and package

Part No.	Package	Packing Option	MSL
ET7222	QFN10L(1.8 mm×1.4 mm)	Tape and Reel ,3K	Level 1
ET7222U	MSOP10(4.9 mm×3.0 mm)	Tape and Reel ,5K	Level 1

Applications

- Differential Signal Data Routing
- USB 2.0 Signal Routing

Pin Configuration

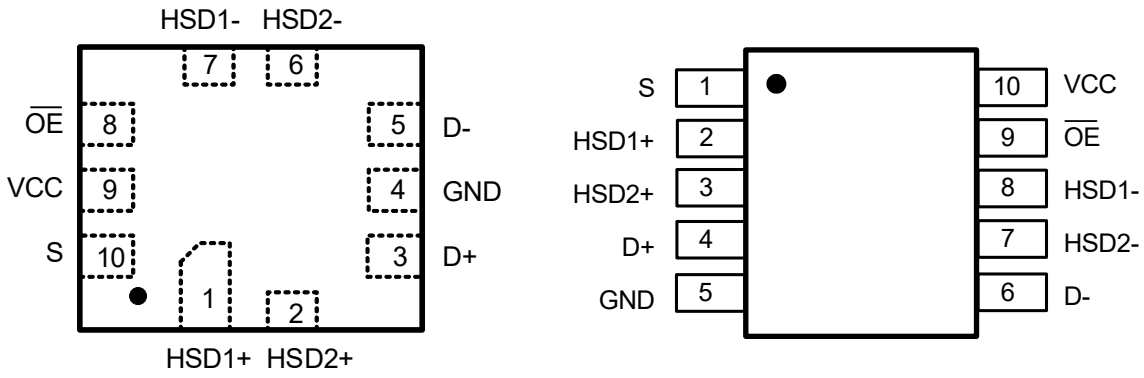

QFN10L（ET7222） MSOP10 (ET7222U)

Top View


Pin Function

Pin NO.		Pin Name	Pin Function
ET7222 QFN10L	ET7222U MSOP10		
1	2	HSD1+	Data Ports
2	3	HSD2+	Data Ports
3	4	D+	Data Ports
4	5	GND	Ground
5	6	D-	Data Ports
6	7	HSD2-	Data Ports
7	8	HSD1	Data Ports
8	9	$\overline{OE}$	Output Enable
9	10	VCC	Power supply
10	1	S	Select Input

Truth Table

$\overline{OE}$	S	HSD1+ to D+, HSD1- to D-	HSD2+ to D+, HSD2- to D-
1	X	OFF	OFF
0	0	ON	OFF
0	1	OFF	ON

Analog Symbol

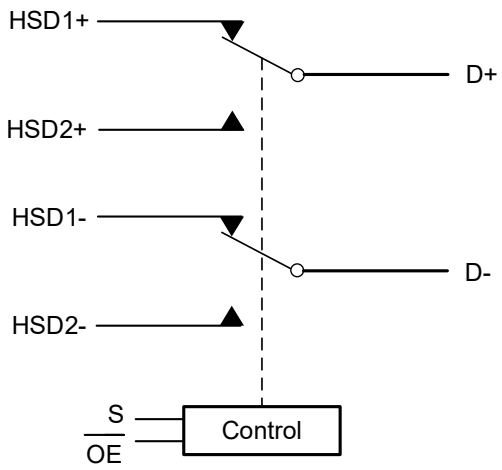

Analog Symbol

Absolute Maximum Ratings

Symbol	Pins	Parameters	Value	Unit
V_{CC}	V_{CC}	Positive DC Supply Voltage	-0.5 to +5.5	V
V_{IS}	HSD1+,HSD1-,HSD2+,HSD2-	Analog Signal Voltage	-0.5 to V_{CC} +0.3	V
	D+,D-		-0.5 to +5.5	
V_{IN}	$\overline{OE}$	Control Input Voltage	-0.5 to +5.5	V
I_{CC}	V_{CC}	Positive DC Supply Current	50	mA
I_{IS_CON}	HSD1+,HSD1-,HSD2+,HSD2- D+,D-	Analog Signal Continuous Current-Closed Switch	±100	mA
I_{IS_PK}	HSD1+,HSD1-,HSD2+,HSD2- D+,D-	Analog Signal Continuous Current 10% Duty Cycle	±150	mA
I_{IN}	$\overline{OE}$	Control Input Current	±20	mA
T_J		Junction Temperature Range	-40 to +150	˚C
T_{STG}		Storage Temperature	-65 to +150	˚C
V_{ESD}		ESD HBM Susceptibility(1)	±6000	V
		ESD CDM Susceptibility(2)	±1500	V
I_{LU}		Latch Up (Current Maximum Rating) (3)	±200	mA

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Note1: HBM tested per JEDEC JS-001;

Note2: CDM tested per JEDEC JS-002;

Note3: Latch up Current Maximum Rating tested per JEDEC78;

Recommended Operating Conditions

Symbol	Pins	Parameter	Min	Max	Unit
V_{CC}		Positive DC Supply Voltage	1.65	4.7	V
V_{IS}	HSD1+,HSD1-,HSD2+,HSD2-	Analog Signal Voltage	GND	V_{CC}	V
	D+,D-		GND	4.7	
V_{IN}	$\overline{OE}$	Digital Select Input Voltage	GND	V_{CC}	V
T_A		Operating Temperature Range	-40	+85	˚C

Minimum and maximum values are guaranteed through test or design across the Recommended Operating Conditions, where applicable. Typical values are listed for guidance only and are based on the particular conditions listed for section, where applicable. These conditions are valid for all values found in the characteristics tables unless otherwise specified in the test conditions.

DC Electrical Characteristics

Control Input (Typical: T_A = 25 °C, V_{CC} = 3.3 V)

Symbol	Pins	Parameter	Conditions	V_{CC} (V)	-40°C to +85°C			unit
					Min	Typ	Max	
V_{IH}	$\overline{OE}$	Control Input High Voltage(4)		2.7 3.3 4.2	1.3 1.4 1.6	-	-	V
V_{IL}	$\overline{OE}$	Control Input Low Voltage(4)		2.7 3.3 4.2	-	-	0.4 0.4 0.5	V
I_{IN}	$\overline{OE}$	Control Input Leakage Current	0 ≤ V_{IS} ≤ V_{CC}	1.65 ~ 4.7	-	-	±1.0	μA

Note4: V_{IH} level is recommended to be consistent with V_{CC} and V_{IL} level is GND to reduce I_{CC} current.

Supply And Leakage Current (Typical: T_A = 25 °C, V_{CC} = 3.3 V, $\overline{OE}$ = V_{CC} or GND, S = V_{CC} or GND)

Symbol	Pins	Parameter	Conditions	V_{CC} (V)	-40°C to +85°C		unit
					Min	Max	
I_{CC}	V_{CC}	Quiescent Supply Current	V_{IS} = V_{CC} or GND; I_{OUT} = 0 A	1.65 ~ 4.7		1.0	μA
I_{CCT}	V_{CC}	Increase in I_{CC} per Control Voltage	V_{IN} = 2.6 V	3.6		10	μA
I_{OZ}	HSD1+ HSD1- HSD2+ HSD2-	OFF Stage Leakage Current	0 ≤ V_{IS} ≤ V_{CC}	1.65 ~ 4.7		±1.0	μA
I_{OFF}	D+, D-	Power OFF Leakage Current	0 ≤ V_{IS} ≤ 4.7 V	0		±1.0	μA

High Speed On Resistance (Typical: T_A = 25 °C, V_{CC} = 3.3 V)

Symbol	Pins	Parameter	Conditions	V_{CC} (V)	-40°C to +85°C			unit
					Min	Typ	Max	
R_{ON}		On-Resistance	V_{IS} = 0.2 V, 0.4 V I_{ON} = 8 mA	2.7 3.3 4.2	-	6.5 6.0 5.5	12 10 8	Ω
R_{FLAT}		On-Resistance Flatness		2.7 3.3 4.2	-	0.3 0.2 0.1	1.5 1 0.5	Ω
△R_{ON}		On-Resistance Matching		2.7 3.3 4.2	-	0.25 0.2 0.15	0.5 0.45 0.4	Ω

Full Speed On Resistance (Typical: T_A = 25 °C, V_{CC} = 3.3 V)

Symbol	Pins	Parameter	Conditions	V_{CC} (V)	-40°C to +85°C			unit
					Min	Typ	Max	
R_{ON}		On-Resistance	V_{IS}=0.2V_{CC}, 0.5V_{CC}, 0.8V_{CC}, V_{CC} I_{ON} = 8 mA	2.7 3.3 4.2	-	9.0 7.5 6.0	12.5 10.5 8.5	Ω
△R_{ON}		On-Resistance Matching		2.7 3.3 4.2	-	0.5 0.4 0.3	0.8 0.7 0.6	Ω
R_{FLAT}		On-Resistance Flatness	V_{IS}=0.2V, 0.4V, 0.7V,1.0V I_{ON} = 8 mA	2.7 3.3 4.2	-	1.0 0.5 0.4	3 1.5 1.2	Ω

AC Electrical Characteristics

Timing / Frequency (Typical: T_A = 25 °C, V_{CC} = 3.3 V, R_L = 50 Ω, C_L = 5 pF)

Symbol	Pins	Parameter	Conditions	V_{CC} (V)	-40°C to +85°C			unit
					Min	Typ	Max	
t_{ON}	Closed to Open	Turn-ON Time		2.7 ~ 4.7	-	14	30	ns
t_{OFF}	Open to Closed	Turn-OFF Time		2.7 ~ 4.7	-	22	30	ns
t_{BBM}		Break-Before-Make Delay	V_{IS} = 0 V to V_{CC}	2.7 ~ 4.7	2	8	-	ns
BW		-3 dB Bandwidth	C_L= 5 pF	2.7 ~ 4.7	-	550	-	MHz
			C_L= 0 pF		-	750	-	

Isolation (Typical: T_A = 25 °C, V_{CC} = 3.3 V, R_L = 50 Ω, C_L = 5 pF)

Symbol	Pins	Parameter	Conditions	V_{CC} (V)	-40°C to +85°C			unit
					Min	Typ	Max	
O_{IRR}	Open	OFF-Isolation	f= 250 MHz	1.65 ~ 4.7	-	-25	-	dB
X_{TALK}	HSD1+ to HSD1-	Non-Adjacent Channel Crosstalk	f= 250 MHz	1.65 ~ 4.7	-	-37	-	dB

Capacitance (Typical: T_A = 25 °C, V_{CC} = 3.3 V, f = 1 MHz)

Symbol	Pins	Parameter	Conditions	V_{CC} (V)	-40°C to +85°C			unit
					Min	Typ	Max	
C_{IN}	$\overline{OE}$	Control Pin Input Capacitance		0		1.8		pF
C_{ON}	D+ to HSD1/2+	ON Capacitance	V_{OE}= 0 V	3.3		8.0		pF
C_{OFF}	HSD2+, HSD2-	OFF Capacitance	V_{IS} = 3.3 V V_{OE}= 3.3 V	3.3		3.5		pF

Typical Characteristics

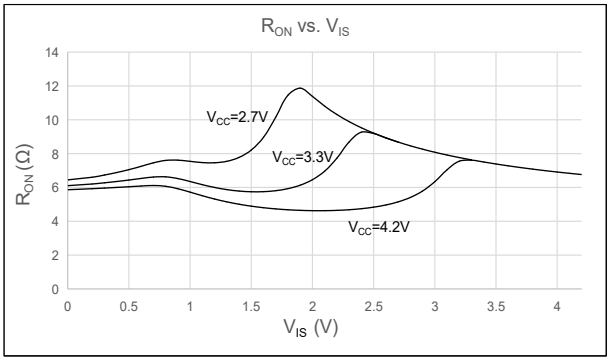


Figure 1. On-Resistance vs. V_{IS}

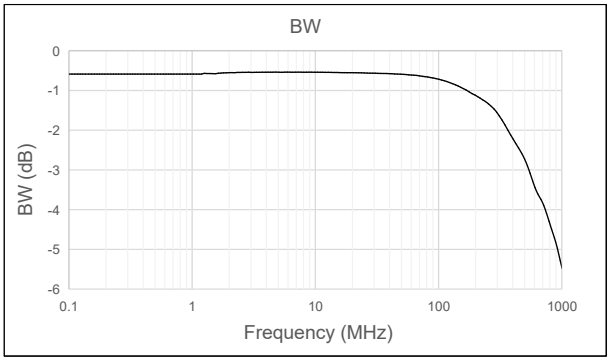


Figure 2. Bandwidth vs. Frequency @V_{CC}=3.3V

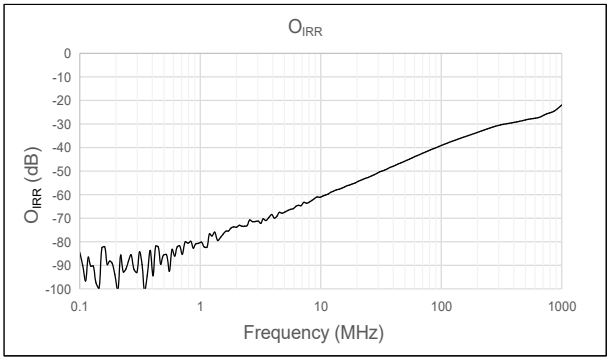


Figure 3. O_{IRR} vs. Frequency @V_{CC}=3.3V

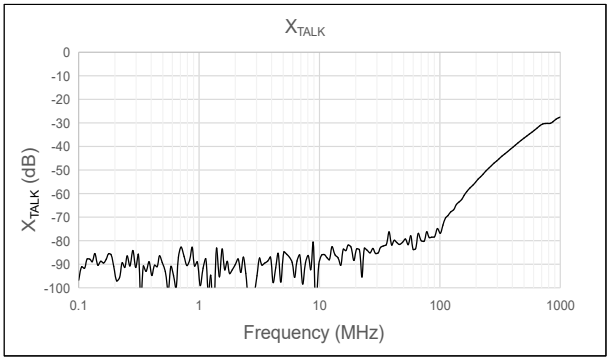


Figure 4. X_{TALK} vs. Frequency @V_{CC}=3.3V

Test Circuit and Waveform

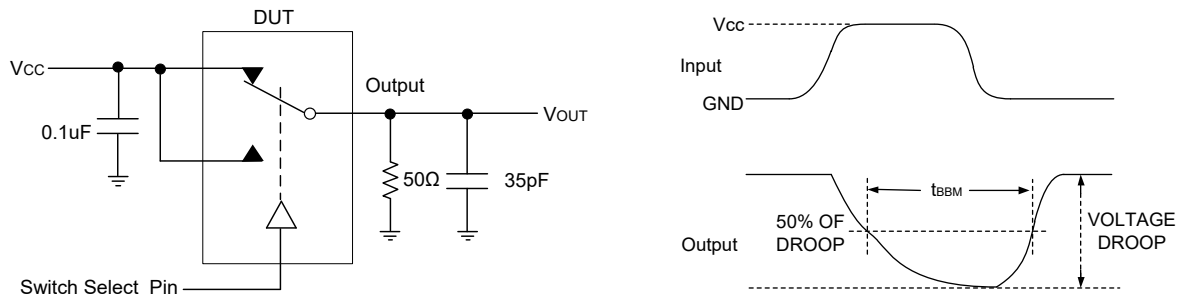


Figure 5. t_{BBM} (Time Break-Before-Make)

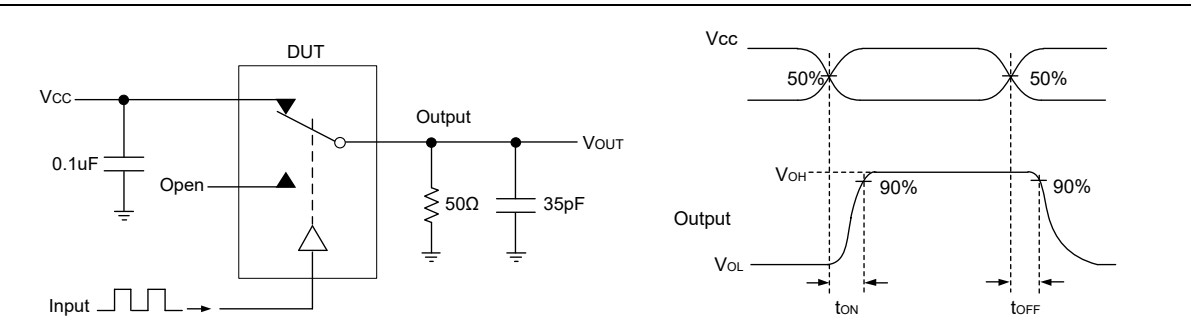


Figure 6. t_{ON} / t_{OFF}

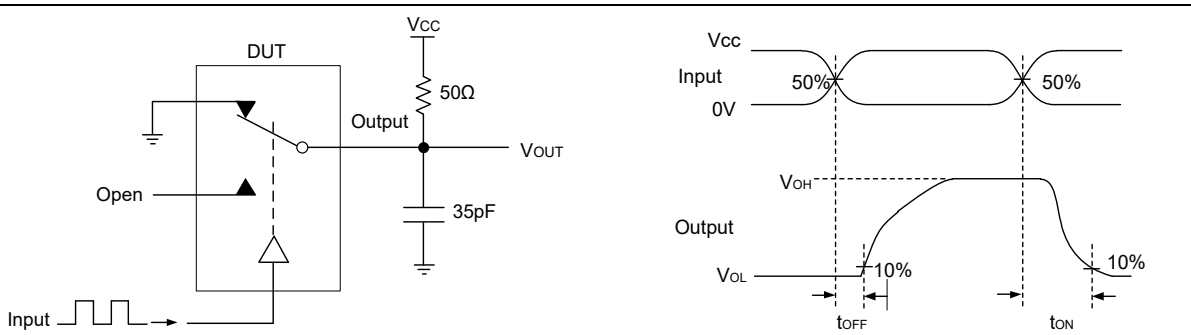


Figure 7. t_{ON} / t_{OFF}

Test Circuit and Waveform(Continued)

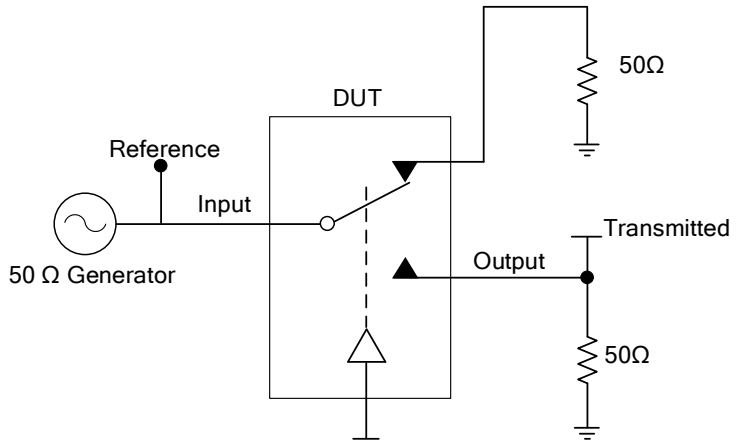


Figure 8. Off Channel Isolation/Crosstalk

O_{IRR} = Off Channel Isolation = 20 lg (V_{OUT} / V_{IN}).

X_{TALK} :Use V_{ISO} setup and test to other switch analog input/outputs terminated with 50 Ω.

Typical Performance Curves

T_A = +25 °C, Unless Otherwise Specified


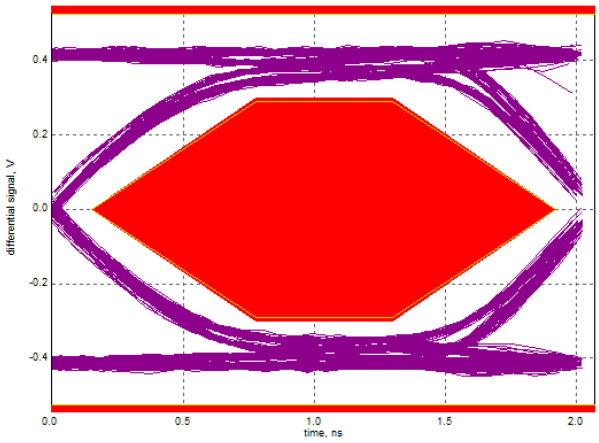


Figure 9. Eye Pattern : 480 Mbps with USB Switch in the Signal Path (near end mask)

Package Dimension

QFN10L

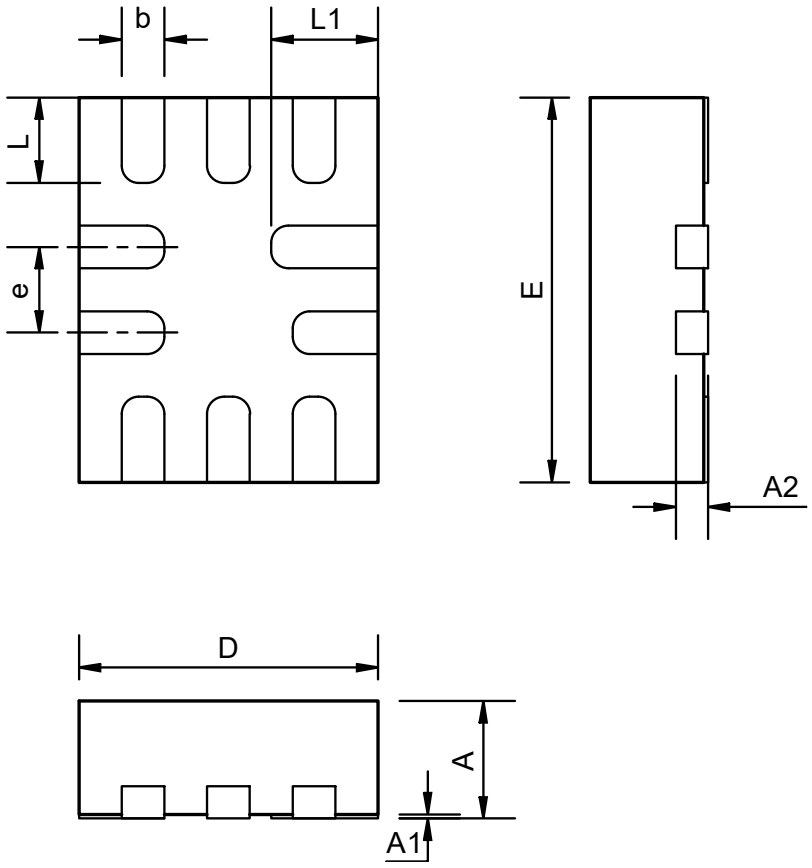


COMMON DIMENSIONS

(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.500	-	0.600
A1	0.000	-	0.050
A2		0.152 TYP	
b	0.150	0.200	0.250
D	1.350	1.400	1.450
E	1.750	1.800	1.850
e		0.400 TYP	
L	0.350	0.400	0.450
L1	0.450	0.500	0.550

MSOP10

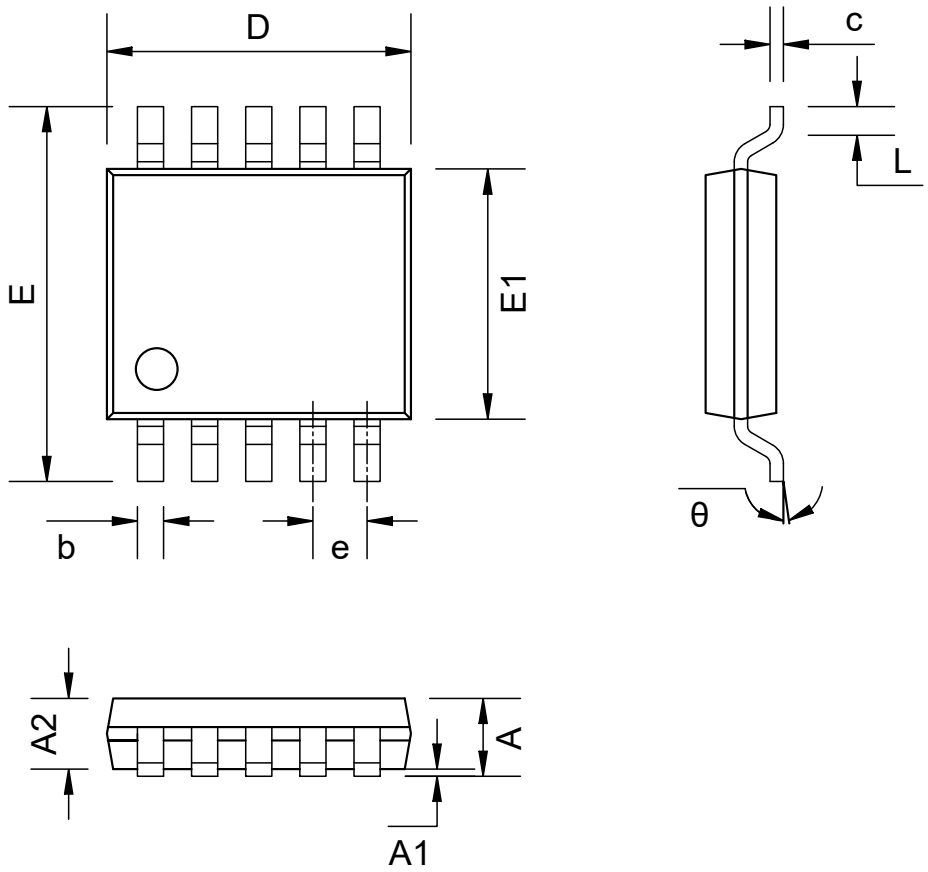


COMMON DIMENSIONS

(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.82	0.95	1.10
A1	0.02	0.07	0.15
A2	0.75	0.85	0.95
b	0.18	0.23	0.28
c	0.09	0.16	0.23
D	2.90	3.00	3.10
E	4.75	4.90	5.05
E1	2.90	3.00	3.10
e	0.50 TYP		
L	0.40		0.80
θ	0°		6°


Tape Information

ET7222(QFN10L)

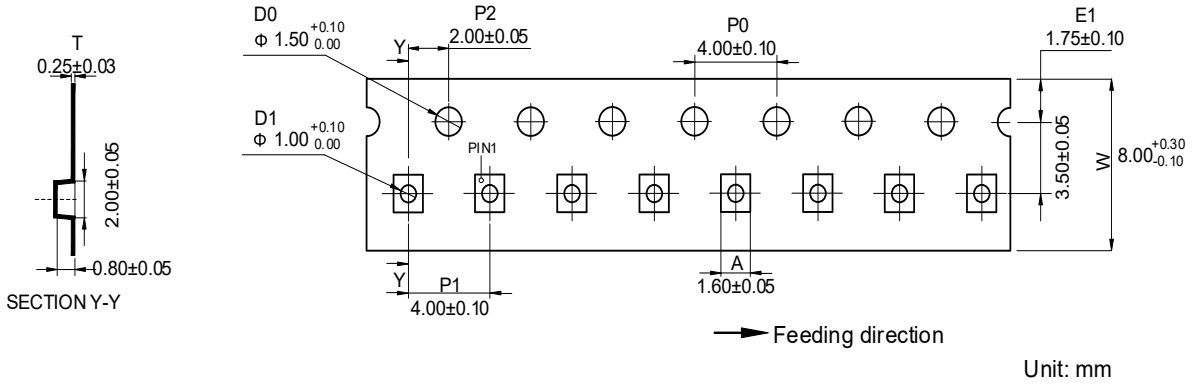

Marking Information

ET7222(QFN10L)



7222 - Part Number

X - Tracking Number, and is variable

ET7222U(MSOP10)



ET7222U - Part Number

XXXXX - Tracking Number, and is variable

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2012-08-07	Preliminary Version	Liuxm	Liuxm	Zhujl
1.1	2016-02-01	Add some parameters	Liuxm	Liuxm	Zhujl
1.2	2017-03-10	Updated typo	Wuxj	Wuxj	Zhujl
1.3	2019-02-01	Update format	Liuxm	Liuxm	Liujy
1.4	2019-04-12	According to the test results Update Typical Value of On-Resistance Flatness, On-Resistance Matching , Turn-OFF Time, OFF-Isolation, Non-Adjacent Channel Crosstalk	Liuxm	Liuxm	Liujy
1.5	2019-06-25	Updated: 1.VIH,VIL Test Spec 2.RON,RFLAT,∆RON Test Conditions 3. RFLAT Test Spec 4.Add max RON, RFLAT, ∆RON value 5.Add Min tBBM value 6. ICC vs. VIN, OFF-ISOLATION,CROSSTALK graph	Liuxm	Liuxm	Zhujl
1.6	2019-09-29	Update OFF-ISOLATION and CROSSTALK	Liuxm	Liuxm	Zhujl
1.7	2020-03-06	Documents check and formalize	Shib	Shib	Liujy
1.8	2022-08-31	Update Typeset	Qinpl	Qinpl	Liujy
1.9	2023-12-14	Update C_{ON} 、C_{OFF} spec according to measured data; Update Vcc range to 4.7V	Wangp	Luh	Liujy
2.0	2024-03-07	Add Marking Information	Yinp	Luh	Liujy
2.1	2025-07-30	Update Typical Characteristics and Eye Pattern	Pansy	Luh	Liujy
2.2	2026-03-09	Add ESD Information	Qinpl	Luh	Liujy
2.3	2026-07-03	Add Tape Information	Qinpl	Luh	Liujy