Low Voltage N-Pole Detection Type

Hall Effect Switch IC

General Description

The ET3712A45BNCLH is a high sensitivity and high-accuracy N pole detection Hall effect switch IC that operates at a low voltage and low current consumption. The output voltage will be pulled low when this IC detects the N pole magnetic flux density is larger than operate point(B_{OPN}) and the output voltage will recover to high until the N pole magnetic flux density is smaller than the release point(B_{RPN}). Using this IC with a magnet makes it possible to detect the open / close status in various applications.

Due to its low voltage operation and low current consumption the ET3712A45BNCLH is suitable for battery powered portable devices such as mobile phones and portable PCs etc.

Features


- Pole detection: N pole type
- Output logic: Active "L"
- Output form: CMOS output
- Magnetic sensitivity: B_{OPN} = 4.5 mT typ.
- Operating cycle: t_{CYCLE} = 50.85 ms typ.
- Current consumption: I_{DD} = typ. 2.0 uA at 1.85V
- Power supply voltage range: V_{DD} = 1.6 V to 5.5 V
- Operation temperature range: Ta = -40°C to +85°C
- Lead-free (Sn 100%), halogen-free
- Package:

Part No.	Package	MSL
ET3712A45BNCLH	SOT553	Level 3

Application

- Open/Close detection for flip mobile phones
- Smart cover for smart phones
- Smart cover for portable PCs, tablet PCs
- Digital video cameras and portable game consoles
- Home appliances

Pin Configuration




TOP VIEW

Pin Function

Pin No.	Pin Name	Pin Function
1	NC	No connection
2	VSS	GND Pin
3	NC	No connection
4	VDD	Power supply pin
5	OUT	Output pin

Block Diagram

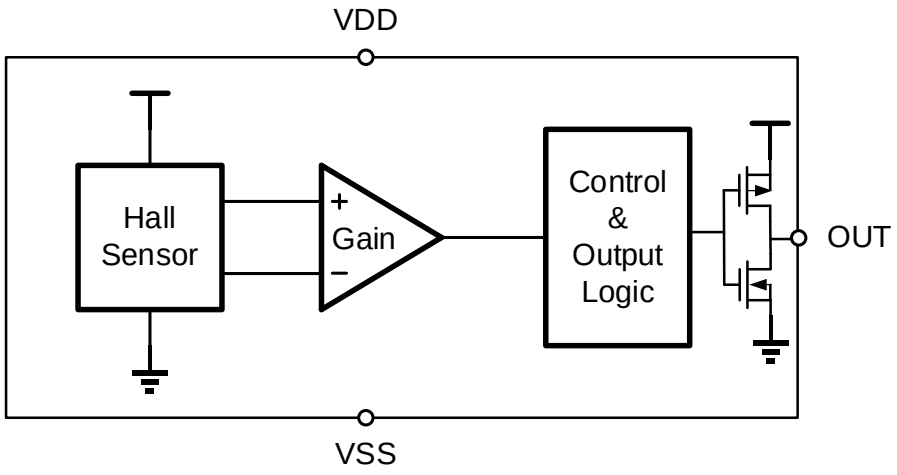


Operation

1. Applied magnetic flux

The magnetic flux applied to ET3712A45BNCLH should on the vertical direction on marking surface. If not, the horizontal component has no effect to detection.


This product is a N-polarity detector, the output voltage (V_{OUT}) is inverted when the magnetic flux is applied to IC.Below shows the direction in which magnetic flux should be applied.

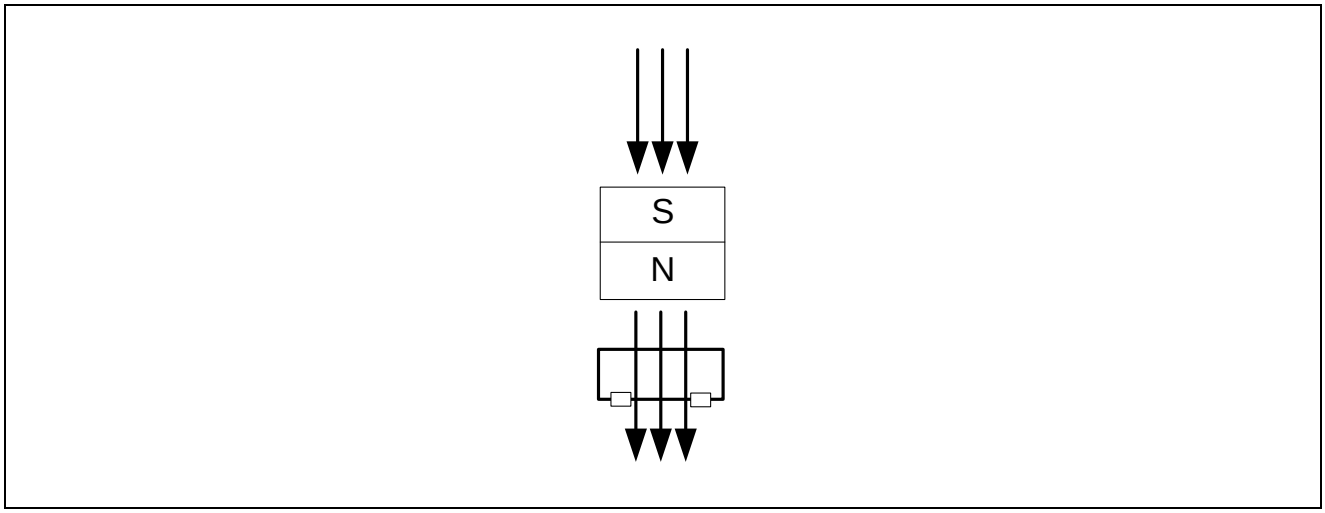

2. Hall sensor Position

The Hall sensor embedded in ET3712A45BNCLH is at the center of IC using SOT-553 package.


As show below, the position of this Hall sensor is located in the area indicated by a circle.

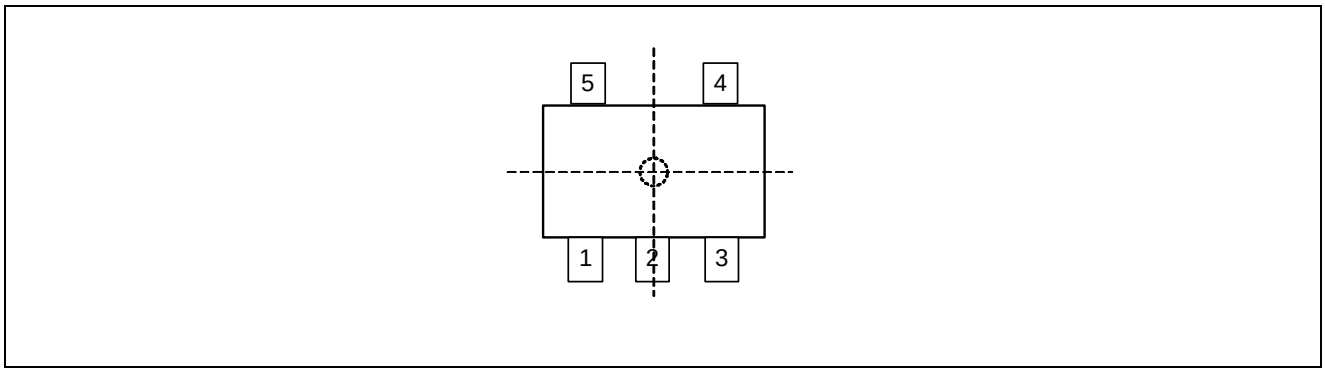

3. Detecting Operation

ET3712A45BNCLH detects magnetic field periodically. When vertical component of the magnetic flux applied to IC exceeds the operating point (B_{OPN}) such as the N pole of a magnet is moved closer to IC, V_{OUT} changes from "H" to "L". On the contrary, if magnetic flux is lower than the release point (B_{RPN}), V_{OUT} changes from "L" to "H".


The relationship between the magnetic flux density and V_{OUT} is shown below.

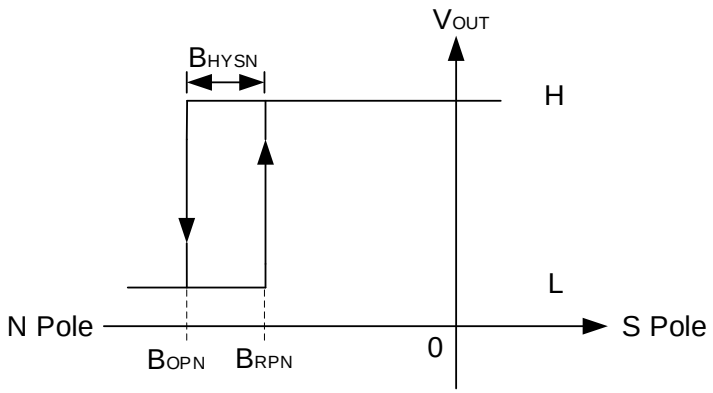

4. Operating Current


ET3712A45BNCLH perform the intermittent operation, therefore the average current consumption depends on the current in active mode, the active period (t_{AW}), the current in sleep mode, and sleep period (t_{SL}). The active current is about 1000uA typically, and 0.5uA at sleep mode. Please refer to electrical characteristic table for detail.

The time dependency of the current consumption is shown below.

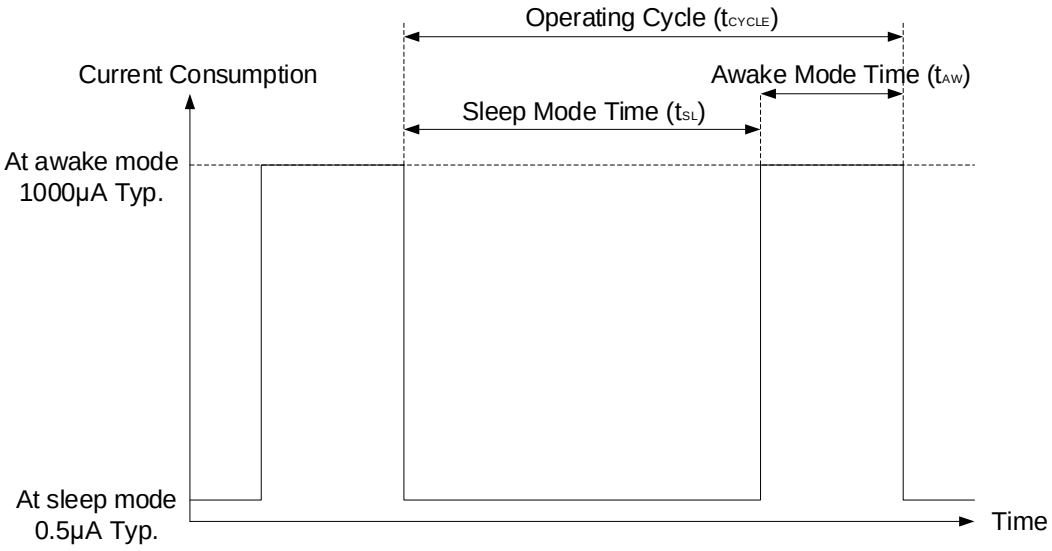

5. Timing Diagram

The operation timing of this IC is shown below.

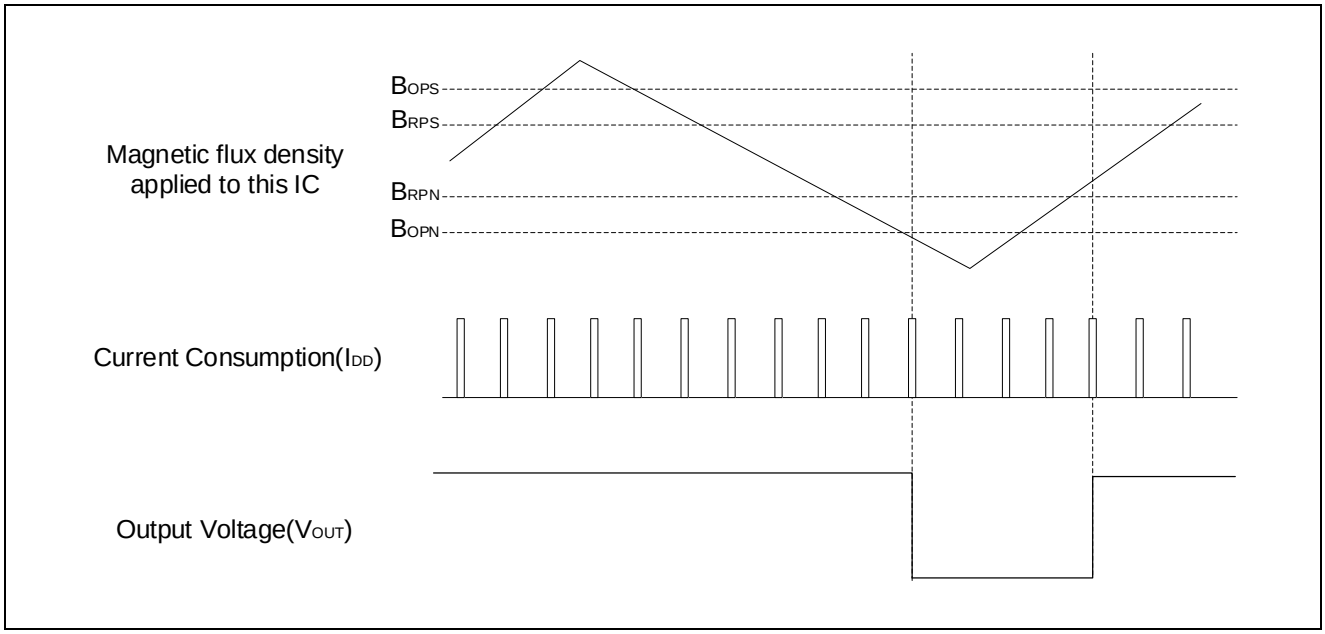

Absolute Maximum Ratings

(Ta = +25°C unless otherwise specified)

Parameters	Symbol	Rating	Unit
Power supply voltage	V_{DD}	V_{SS}-0.3~V_{SS}+7.0	V
Output current	I_{OUT}	±1.0	mA
Output voltage	V_{OUT}	V_{SS} − 0.3 ~ V_{DD} + 0.3	V
Operation ambient temperature	T_A	−40 ~ +85	°C
Storage temperature	T_{STG}	−40 ~ +125	°C
Junction-to-ambient thermal resistance	θ_{JA}	300	°C/W

Caution: The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.

Electrical Characteristics

(Ta = +25°C, V_{DD} = 1.85 V, V_{SS} = 0 V unless otherwise specified)

Parameters	Symbol	Conditions	Min	Typ	Max	Unit
Power supply voltage	V_{DD}	-	1.60	1.85	5.50	V
Current consumption	I_{DD}	Average value		2.0	4.0	uA
Output voltage	V_{OUT}	Output transistor Nch, I_{OUT} = 0.5 mA			0.4	V
		Output transistor Pch, I_{OUT} = -0.5 mA	V_{DD}-0.4			V
Awake mode time	t_{AW}			0.05		ms
Sleep mode time	t_{SL}			50.80		ms
Operating cycle	t_{CYCLE}	t_{AW} + t_{SL}		50.85	100.00	ms

Magnetic Characteristics

(Ta = +25°C, V_{DD} = 1.85 V, V_{SS} = 0 V unless otherwise specified)

Parameters		Symbol	Conditions	Min	Typ	Max	Unit
Operation point(1)	N pole	B_{OPN}		-6.0	-4.5	-2.5	mT(4)
Release point(2)	N pole	B_{RPN}		-5.5	-3.5	-2.0	mT
Hysteresis width(3)	N pole	B_{HYSN}	B_{HYSN}= | B_{OPN} − B_{RPN} |		1.0		mT

Notes:

***1**. Operating points (B_{OPN}):

B_{OPN} is the value of magnetic flux density triggers the output voltage (V_{OUT}) to low by increasing the N pole magnetic flux density applied to this IC.

Even when the magnetic flux density is larger than B_{OPN}, V_{OUT} status is held

***2**. Release points (B_{RPN}):

B_{RPN} is the values of magnetic flux density makes the output voltage (V_{OUT}) recover to high by decreasing the magnetic flux density applied to this IC.


Even when the magnetic flux density is lower than B_{RPN}, V_{OUT} status is held.

***3**. Hysteresis widths (B_{HYSN}):

B_{HYSN} is the difference between B_{OPN} and B_{RPN}.

***4**. The unit of magnetic density mT can be converted by using the formula 1 mT = 10 Gauss.


Typical Application Circuit

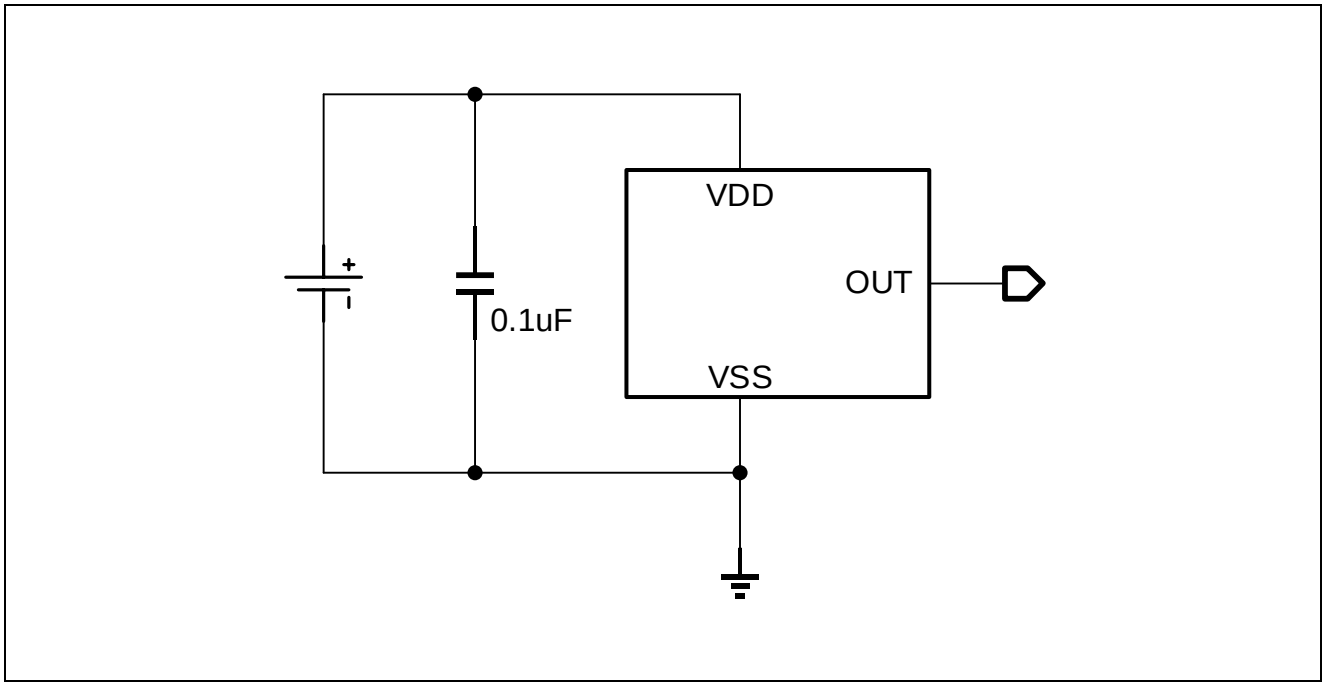


Precautions

- The power supply for this IC should has low impedance, the IC may malfunction due to a supply voltage drop caused by feed through current.
- Power supply voltage rapidly changing may cause IC malfunction.
- Large stress on this IC may affect the magnetic characteristics. Avoid large stress applied to the IC on a board.

Tape Information

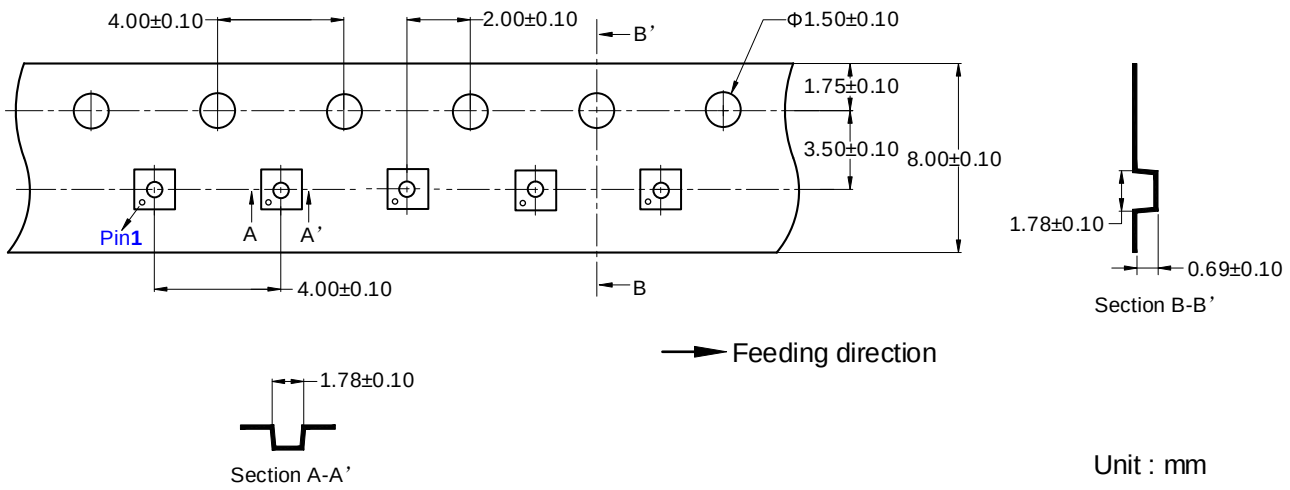

Marking




12P - Part Number

XX - Tracking Number

Note: XX (Tracking Number) is variable, according to the wafer lot number.

Package Dimension

SOT-553

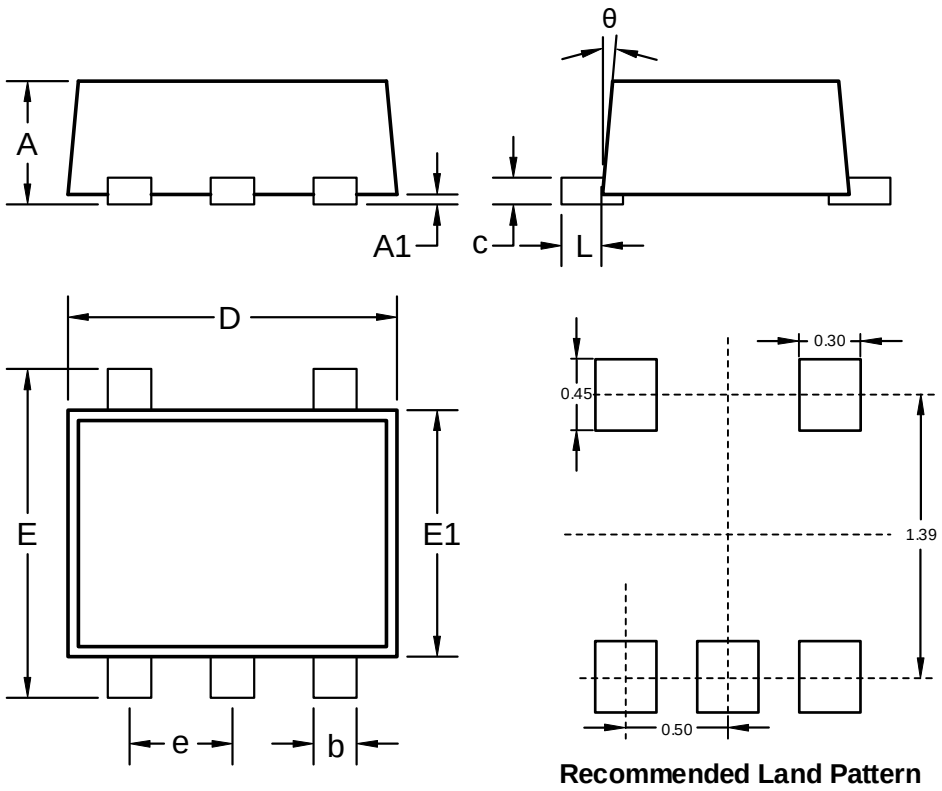

Recommended Land Pattern

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.525	-	0.630
A1	0	-	0.080
e	0.450	0.500	0.550
c	0.090	-	0.160
D	1.500	1.600	1.700
b	0.170	-	0.270
E1	1.100	1.200	1.300
E	1.500	1.600	1.700
L	0.100	0.200	0.300
θ	7°REF		

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2019.11.8	Preliminary Version	Chenh	Wanggp	Zhujl
1.1	2023.1.11	Data Sheet Update	Shibo	Wanggp	Zhujl
1.2	2025.7.11	Modify the dimensions of SOT553 package, Add tape and marking	Zhangy	Wanggp	Liujy
1.3	2026.10.16	Update packaging information	Zhangy	Wanggp	Liujy